

QRX
QRX 12 /14 / 16



“V” Rakes





**Your partner
in farming**





QRX

QRX 12 /14 / 16

When it comes to crafting the perfect hay, you need a balance of **quantity and quality**. At Sitrex, we understand that every stage of the process matters. That's why, since 1970, we've been innovating to help you preserve the feed value of your forage.

From the moment you start **harvesting** to the final **bale wrap**, Sitrex is your trusted partner. We're not just experts: we're farmers at heart and we understand the challenges you face. Together, we'll master every shade of green and gold, ensuring your forage is the best it can be.

Choose Sitrex's agricultural machinery to turn your **haymaking** into a success.

QRX

QRX 12 /14 / 16

Independent raking
finger wheels.

Hydraulic extension.

Tubular frame 150x100.


Tandem wheels for
easy travelling over
uneven terrain.

Extension/angle
switching with remote
control.



Hydraulic angle.

Suspension spring
preload adjustment.

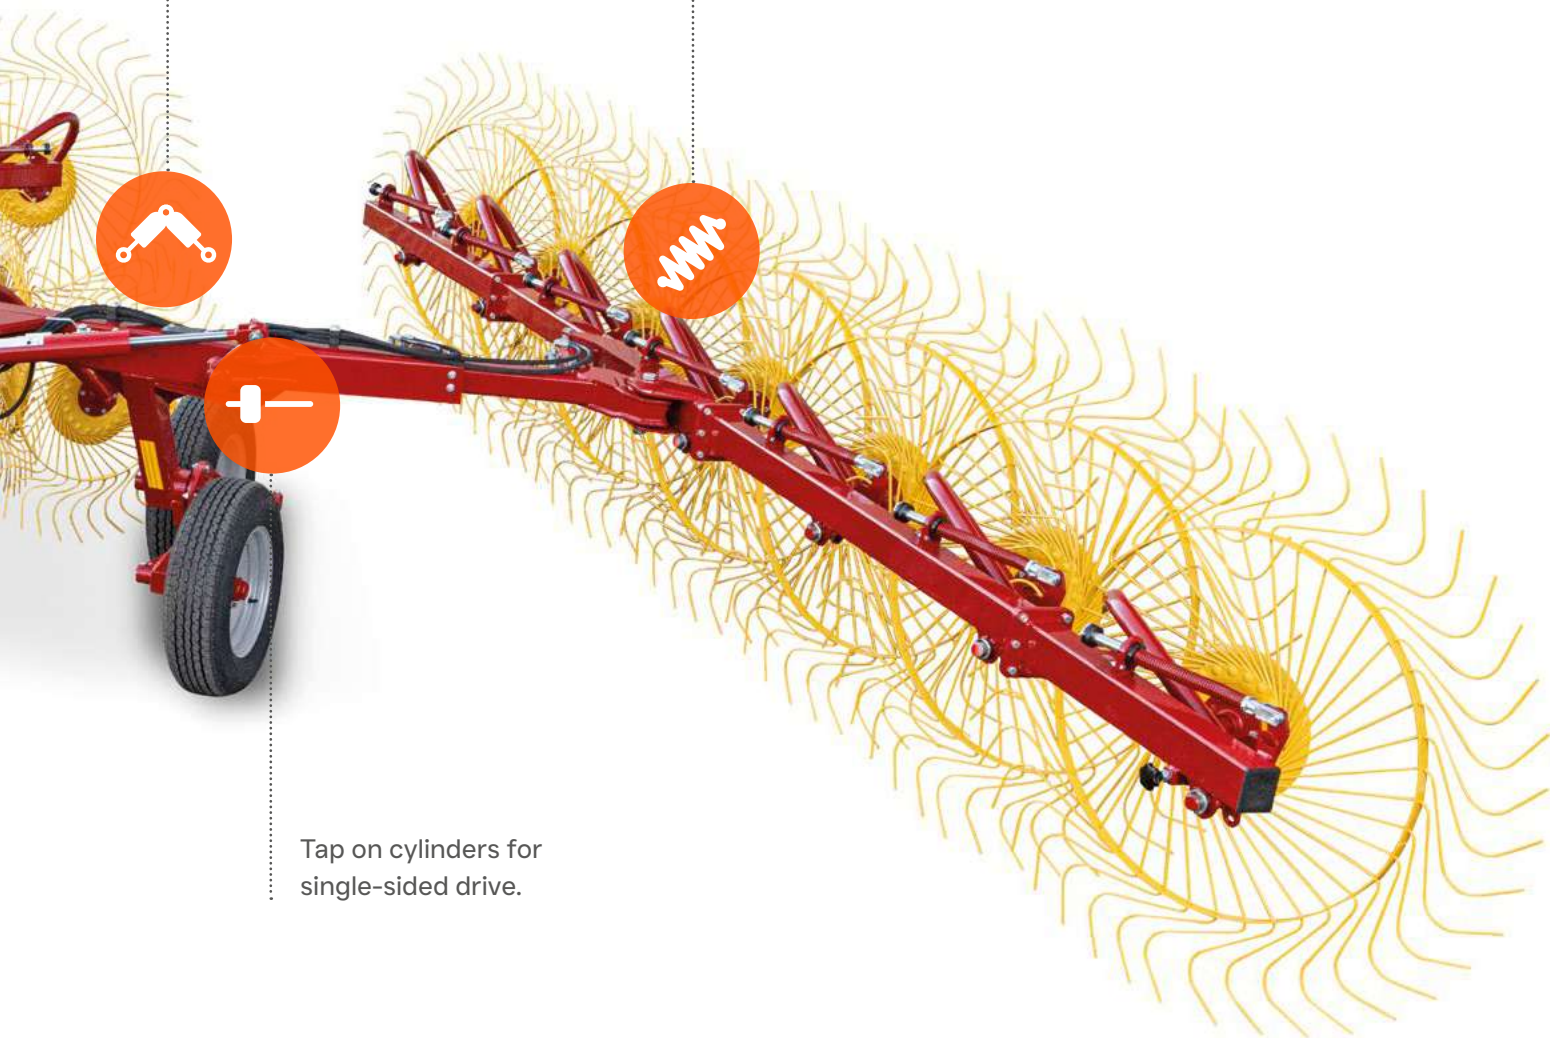

Tap on cylinders for
single-sided drive.

QRX

QRX 12 /14 / 16

QRX, "V" Type Wheel Rakes. Excellent performance.




The new QRX range of "V" type wheel rakes with 12, 14 or 16 wheels are easy to use machines that have a strong frame and therefore are able to provide excellent performance as regards both quantity and quality. Although very compact, and thus able to guarantee great manoeuvrability in narrow

spaces and over irregular ground, and at the same time excellent quality work and great stability both while working and during transport, they have a variety of systems and devices that make them comparable to higher range machines in terms of performance, but with lower operating costs.

These features make it possible to obtain performance of the highest quality from every point of view.

The actuator selector (angulation - extension) makes it possible to quickly adjust the working width and windrow width from the distributor tractor.

Optional Accessory Kits

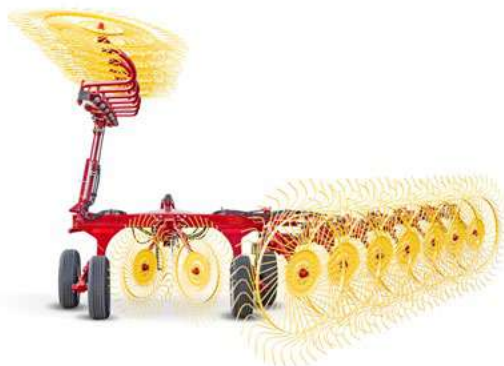

Double Centre Kicker Wheel Kit

A simple additional central rake wheel can be mounted at any time, either independently or connecting it to the machine's standard hydraulic circuit, without having to make any changes to the basic machine.



Specifications	QRX 12	QRX 14	QRX 16
Number of finger wheels	12	14	16
Finger Wheel Diameter	55" - 1.4m	55" - 1.4m	55" - 1.4m
Finger Wheel Tine Diameter	0.28" - 7mm	0.28" - 7mm	0.28" - 7mm
Finger Wheel Diameter (Optional)	60" - 1.52m	60" - 1.52m	60" - 1.52m
Finger Wheel Tine Diameter	0.3" - 7.5mm	0.3" - 7.5mm	0.3" - 7.5mm
Maximum Windrow Width	6' 7" - 2m	6' 7" - 2m	6' 7" - 2m
Minimum Windrow Width	3' - 0.9m	3' - 0.9m	3' - 0.9m
Maximum Working Width	25' 1" - 7.65m	28' - 8.5m	30' 5" - 9.3m
Minimum Working Width	21' 12" - 6.7m	24' 11" - 7.6m	27' 9" - 8.5m
Minimum Transport Height	9' 2" - 2.8m	9' 2" - 2.8m	9' 8" - 2.95m
Minimum Tractor HP Required	50 HP - 36.7 kW	60 HP - 44 kW	75 HP - 55 kW
Tyres	205-75/15	205-75/15	205-75/15
Transport Width	9' 2" - 2.8m	9' 2" - 2.8m	9' 2" - 2.8m
Weight	2955 Lbs - 1340 kg	3330 Lbs - 1510 kg	3616 Lbs - 1640 kg

Designs, materials and/or specifications are subject to change without notice and without liability thereof.

Your partner in farming



Organization with certified Management System ISO 9001

Viale Grecia, 22 - 06018 Trestina (PG) - ITALY | **Phone:** +39 075.854.00.21 | **Email:** sitrex@sitrex.it | **www.sitrex.com**