

Smyth
WELDING
& MACHINE SHOP LTD.

37452 Glen's Hill Road R.R. #2 Auburn, ON N0M 1E0

Ph: 519-529-7212 Fax: 519-529-3277

Email: info@smythwelding.com

www.smythwelding.com

LAND ROLLERS




Model "VS" Series

Smyth "VS" series land rollers incorporate all the necessary design features to make it last for many years to come. Features like 1½" diameter (greaseable) wing pivot pins, 4 extra wide wheel lift bushings, 4" x 4" x ¼" wall tube frame, 30" dia rollers, 3/8" thick main drum and 7/16" thick wings with 5/16" thick reinforced ends, heavy duty industrial hydraulic cylinders, as well as adjustable scrapers are just some of the great advantages of owning a Smyth roller!



Safety features like transport lighting and over center latch on lift axle are just some of the items that come standard on Smyth land rollers.

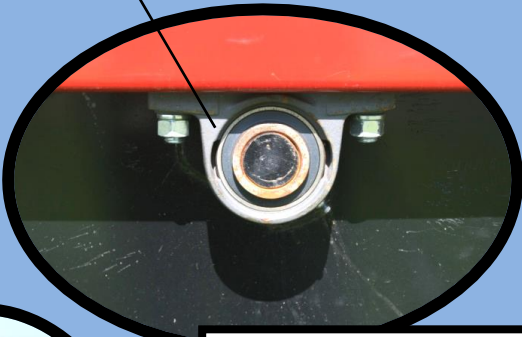

High pressure 4" x 24" hydraulic wing cylinders, with cylinder float. No lock-up required.

Shock Absorbers in hitch assembly allow for greater ground speeds by minimizing for & aft pitching action when in field position.

Patent Pending

Heavy duty 2" bearings with ductile housing.



Available widths: 22' to 34'
 Weight per foot: 265 lbs/ft
 Transport width: 13' 6"
 Transport height: 8' 6" to 14' 2"

High pressure 4" x 10" cylinder with unique over center lift requires no lock-ups and sequences unfold ie: wings completely unfold before center drum is lowered. Patent Pending

Model "XS" Series

Our one of a kind X-Fold model comes loaded with features not found on other rollers. For example, adjustable scrapers, transport lighting, adjustable tongue and 2" wing pivot pins are all part of the package!

What makes this model so unique is the over-center lift linkage system. There is no need for lock up's on lift or wings. With a 4-wheel mono frame design, there is virtually no tongue weight, which makes it ideal for pulling behind other implements. When folded, the "XS" is extremely maneuverable, which makes backing up and sharp turns a breeze. These rollers are very compact with the tongue folded upright. A 42' roller will sit on a 14' sq. foot print (14' x16' for larger models) for easy storage!



12' main section for up to 43' rollers & 44' and up, have 14' main section.

Full floating wing in folded position



Heavy duty 2" bearings with ductile housing.

Main drums are 30" x 3/8" wall pipe, 7/16" thick wings drums with 5/16" reinforced end plates and 2" greaseable pins for wing hinge.

4" x 28" Raise & Lower Lift Cylinders

Wing Lift Cylinders:
4½" x 54" trunnion mount

Over - centering four-bar lift assembly requires no lock-up's for transport.

Compact X-Fold design means easy storage and maneuverability.

Available widths: 30' to 47'
Weight per foot: 280 lbs/ft
Transport width: 14' (over 44' is 16')
Transport height: 9' 6" to 14' 6"



The Benefits of Land Rollers

Land rollers have always played a key role in most types of farming operations. Now more than ever, farmers are finding more advantages to rolling all types of crops. Not only for firming soils around seed, and to give good seed- to- soil contact, but also to press stones into the ground to protect forage and harvest equipment. Rolling new crops at key times, before or after emergence, can also help retain moisture for better yields in dry conditions. Farmers have also found fall rolling to be extremely beneficial in breaking down heavy stalk crops over the winter months.

Corn, soybeans, wheat, and everything in between, think Smyth Land Rollers for all your rolling needs!

www.smythwelding.com



Distributed By: