

Quicke



IMPLEMENTS

FOR FRONT LOADERS / YARD LOADERS / COMPACT LOADERS /
WHEEL LOADERS AND TELEHANDLERS


QUICKE TINES

We use our own tines.

Forged tines feature high quality, replaceable 500 HB bolt on forged tines. Our own forged tines are called Q-tines and are available in straight or curved versions.



1



1. Sleeve chamfer and nut in complete match for perfect fit

2



2. Perfect ramp between thread and cone for longer lifetime

3




3. Perfect match between sleeve and tine for longer lifetime

4



4. Semi-rounded shape for optimal performance

5



5. Shorter tip for increased wear resistance

6



6. Thoroughly tested in lab and field to achieve the superiority of the Q tine

We also offer hardened welded profile cut tine in straight or curved.

Profiled tines are 400 HB cut tines welded in tine carriage providing excellent wear capabilities.




FRONT LOADERS


WHEEL LOADERS


TELEHANDLERS


YARD LOADERS


SKIDSTEERS



COMPACT TRACTOR LOADERS

GET MORE WORK DONE IN LESS TIME WITH Q-COMPANION®




Q-COMPANION®







SAVE TIME

SelectoFix is a great time saving option if the front loader has a third or a fourth service. With a simple movement, the implement hoses are coupled, easily and without any problems, even when the system is pressurised. Your work continues within seconds. The connections are easy to clean, reducing the risk of finding its way into the tractor's hydraulic system.



SELECTO FIX



CONTENTS

BUCKETS	4-27	Grading Bucket XL	26	Flexibal	38
Buckets Overview	4-5	Grading Bucket	26	Balecut	39
Hook Systems & accessories	6-9	Grading Bucket S	26	Silosplit	39
Bucket Type S	10-13	Precision Bucket	26		
SXL+	12	Stone Fork XL+	27	BALE FORKS	40-45
SL+	12	Stone Fork M+	27	Bale Fork XL+ 200	41
SM+	12			Bale Fork L 200	43
SM	12	MANURE AND SILAGE	28-35	Bale Fork L+ 150 (fixed tines)	43
Bucket Type G	14-17	Powergrab XL+	29	Bale Fork L+ 150 (folding tines)	43
GXL+	16	Powergrab L+	29	Bale Fork M 180	44
GL+	16	Powergrab M+	29	Bale Fork M 140	44
GM+	16	Silocut XL+	30	Bale Fork S+ 115 (fixed tines)	45
GS+	16	Silocut L+	30	Bale Fork S+ 115 (folding tines)	45
GM	17	Silocut M+	31	Bale Spike	45
GS	17	Multigrab L+	32		
Bucket Type V	18-21	Multigrab S+	32	LIFTING IMPLEMENTS	46-49
VXL+	20	Multigrab C for Compact Tractors	32	Pallet Fork XL	47
VL+	20		33	Pallet Fork L	47
VM+	20	Multibenne L+	33	Pallet Fork M	47
VS+	20	Multibenne M+	33	Pallet Fork M+ Hydraulic	48
VL Classic	21	Silograb L+	34	Pallet Fork S	48
VM	21	Silograb M+	34	Pallet Fork C	48
VS Classic	21	Silograb S+	34	Big Bag Lifter	49
Compact & Utility Buckets	22	Multifork L+	35	Tool Carrier Adaptors	49
U Bucket	22	Multifork S+	35		
Compact Bucket C with Euro	22	Manure Fork L+	35	WEIGHTS AND BUMPERS	50-54
Compact Bucket C with Skid Steer	22	Manure Fork M+	35	Weights Overview	51
Special Buckets	23-27			So Easy Wheel Weights	51
Multi Purpose Bucket	23	BALE HANDLING	36-39	Weights	52-53
Multi Purpose Utility Bucket	23	Unigrip L+ / XL+	37	Add-ons	54
Multi Purpose Compact Bucket	23	Unigrip S+ / M+	37		
High Tip Bucket XH M+	24	Quadrogrip TS	38	THE SUPPORT	55
Special Clearing Bucket SC M+	24	Topgrip	38	HOOCS SYSTEMS	56



	S	G	V
			
	SXL +	GXL +	VXL +
	SL +	GL +	VL +
	SM +	GM +	VM +
	-	GS +	VS +
	-	-	VL Classic
	SM	GM	VM
	-	GS	VS Classic
Size & performance ↑	Type of bucket →		

Model with a + are available with Bolt on Hooks and accessories.

BUCKET SIZES AND EXPLANATION	
XL Bucket	Wheel loaders and large telehandlers
L Bucket	Telehandlers, wheel loaders and big front end loaders
M Bucket	Front end loaders, compact wheel loaders and small telehandlers
S Bucket (small)	Yard loaders and small front end loaders

BUCKETS

EXACTLY THE RIGHT BUCKET

Quality and stability, productivity and safety: For Quicke, there are many good reasons – and now even more. We have improved our bucket range and are very proud to introduce the next generation! The adjacent matrix is a quick reference to the three basic types of bucket that are available and depending upon your needs, you will find the optimal solution: for all your individual loader requirements. Whether it's operating conditions, size, material type or a specialist bucket for all applications.

Simply choose Quicke – always the right choice.

OUR RANGE OF BUCKETS:



ALWAYS THE BEST FIT

Whether it's a small yard loader or an agricultural wheel loader, you can be sure with Quicke offers a wide range of our modular bucket range that you will always get the perfect fit and function for machine. With more than 60 bolt on hooks available, Quicke offers a wide range of options for your loader. Our promise: Quicke always fits!

! Quicke offers both welded and bolt on types of hooks (BoH).


! Quicke offers a wide range of hook types, adapted to a wide range of loader brands and models, but also especially adjusted hooks to suit loaders with e.g. Z-linkages, large tyres and limited roll back angles.

! Quicke use "Cutting edge-technology" to ensure that your Bucket get perfect fit and function on your loader.

! Quicke offer easy assembly of all available bolt on cutting edges. The tightening of the bolts is done completely from the top without use of nuts as the threads are integrated in the bolt on cutting edge.

! Quicke offers bolt on spill guard that is easy to install pre-drilled holes. The loaders tool carrier is thereby protected from overflowing material.

! Quicke offer plastic side "wall savers" to prevent damage to walls. Bucket side sheets come prepared for wall-savers that are easily bolted on.

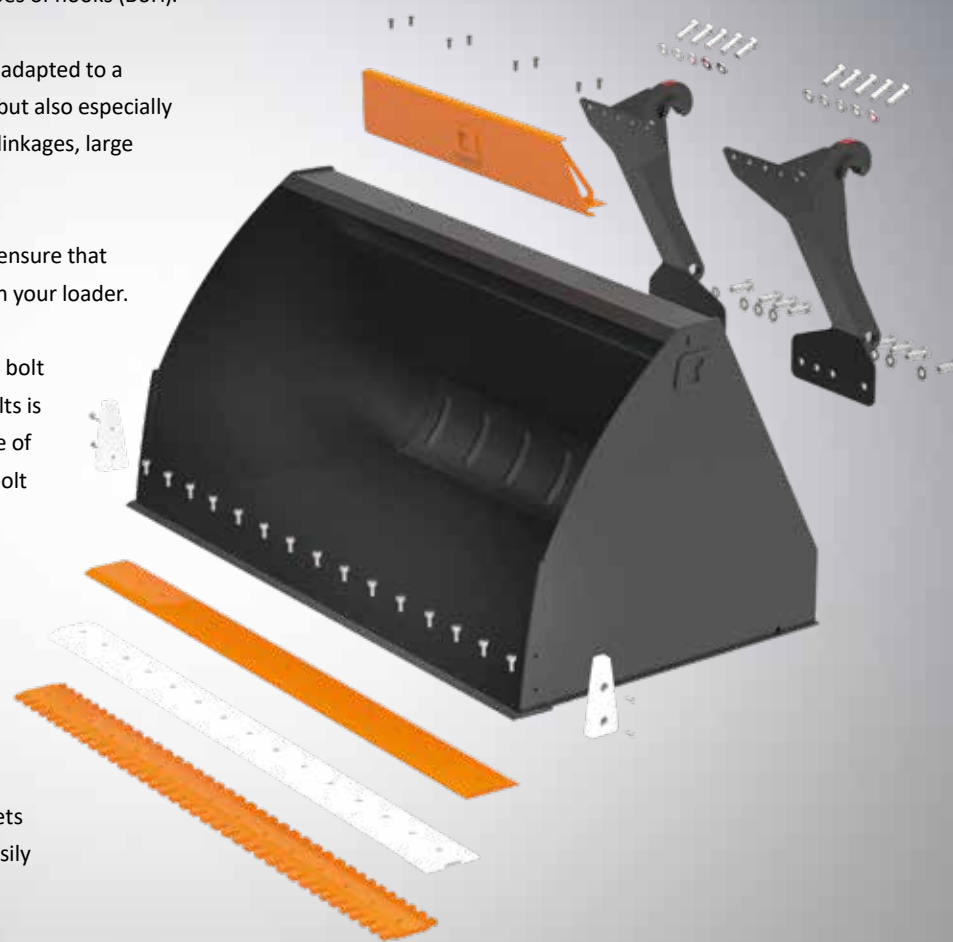


BoH M16 for M and S type bucket based implements



BoH M24 for all XL and L type bucket based implements




Widths made for your requirements

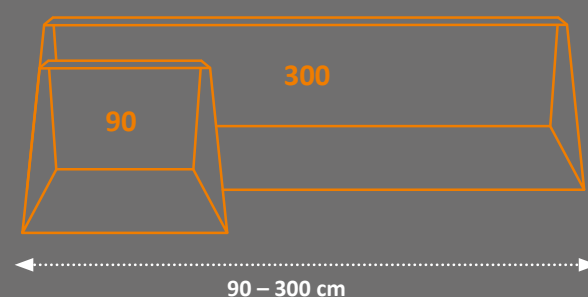

A SAFE CHOICE

Quality: From computer simulation to field testing with the heaviest loads to the hard endurance test on the fatigue test rig – Quicke's robust development programme tests the bucket design and material combinations in theory and practice. We leave nothing to chance.

Accessories: Choose your bucket with the right accessories: customer-specific solutions are our strength. Best of all, Quicke buckets are designed to be particularly easy to maintain, and when it comes down to it, Quicke Parts are quickly delivered wherever you are.

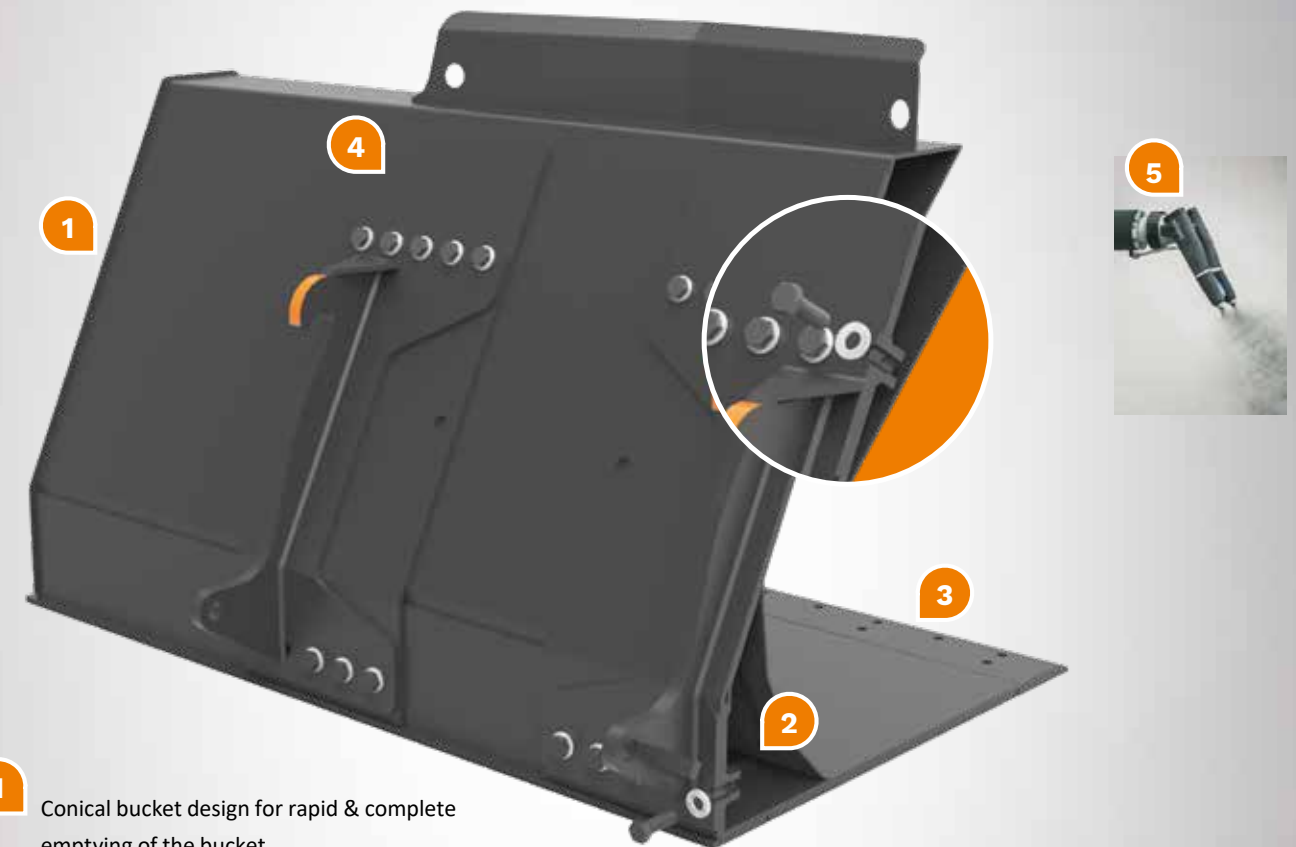

1 Conical bucket design for rapid & complete emptying of the bucket.

2 Heavy box-section design provides torsional strength for the bucket, at the same time covering the rigid BoH system leaving bucket interior clean for easy filling.

3 500 Brinell hard cutting edges and thick well-placed wear plates under the bucket increase bucket life allowing for greater productivity.

4 Large saddle plates on the bucket back that smoothly transfers the force of the loader to the bucket bottom and cutting edge.

All Quicke implements are painted and protected using the very latest powder coating technology.

“ We have restructured our bucket programme to further improve the bucket design and increase the flexibility by offering additional BoHs. Furthermore, our selection of accessories allows you to 'Build your Bucket' by optimizing it for your particular needs. The result: The next generation buckets. Tailor-made for maximum productivity in agriculture.”



Henrik Jönsson, Product Manager Implements

HOOK SYSTEMS & ACCESSORIES

A VARIETY OF HOOK SYSTEMS FOR A VARIETY OF LOADERS

Quicke Implements are possible to attach to most types of AG material handlers on the market thanks to the flexibility of our Bolt on Hooks systems.

Implements designed primarily for front loader use come as standard with welded Euro hooks to make configuration easier.

Many implements are available with accessories to further increase productivity and service life of your implement. All Quicke bolt on cutting edges are reversible and hardened to 500 HB. Bolt on bucket teeth comes in 400 HB.

When viewing this brochure check out the symbols below to find out how the implement can be configured.

EXPLANATION OF THE SYMBOLS			
	Bolt on Hook, available BoH kits		Available with accessories
	Available welded Hooks		Pressure relief valve needed if the working pressure of the loader is higher










HOOK SYSTEMS	
CATEGORY	
	M24
	M16 S/L
	80x80 XL
	80x80
	60x80
	40x80



If you are a registered dealer please log into dealer.quicke.com


Please find the available hook systems for vehicles with the help of our configurator dealer.quicke.com

AVAILABLE ACCESSORIES FOR IMPLEMENTS WITH +


										
Bucket Type	Cutting edge standard	Cutting edge plastic	Cutting edge serrated	Bolt on bucket teeth's		Teeth protection	Wall saver plastic	Spill guard	Wood chips spill guard	Grain handling sides
SXL + / SL +	X			X		X		X		
SM +	X	X	X	X		X		X		
VXL + / VS +	X	X	X				X	X		
VL +	X	X	X				X	X	X	X
VM +	X	X	X				X	X	X	
GXL + / GL + / GM + / GS +	X	X	X				X	X		

BUCKET TYPE S

The concave gable design of the soil bucket allows excellent penetration into hard materials such as rocks, gravel, soil and sand. The bucket bottom is shorter than of other buckets but still long enough for full utilisation of the bucket capacity.

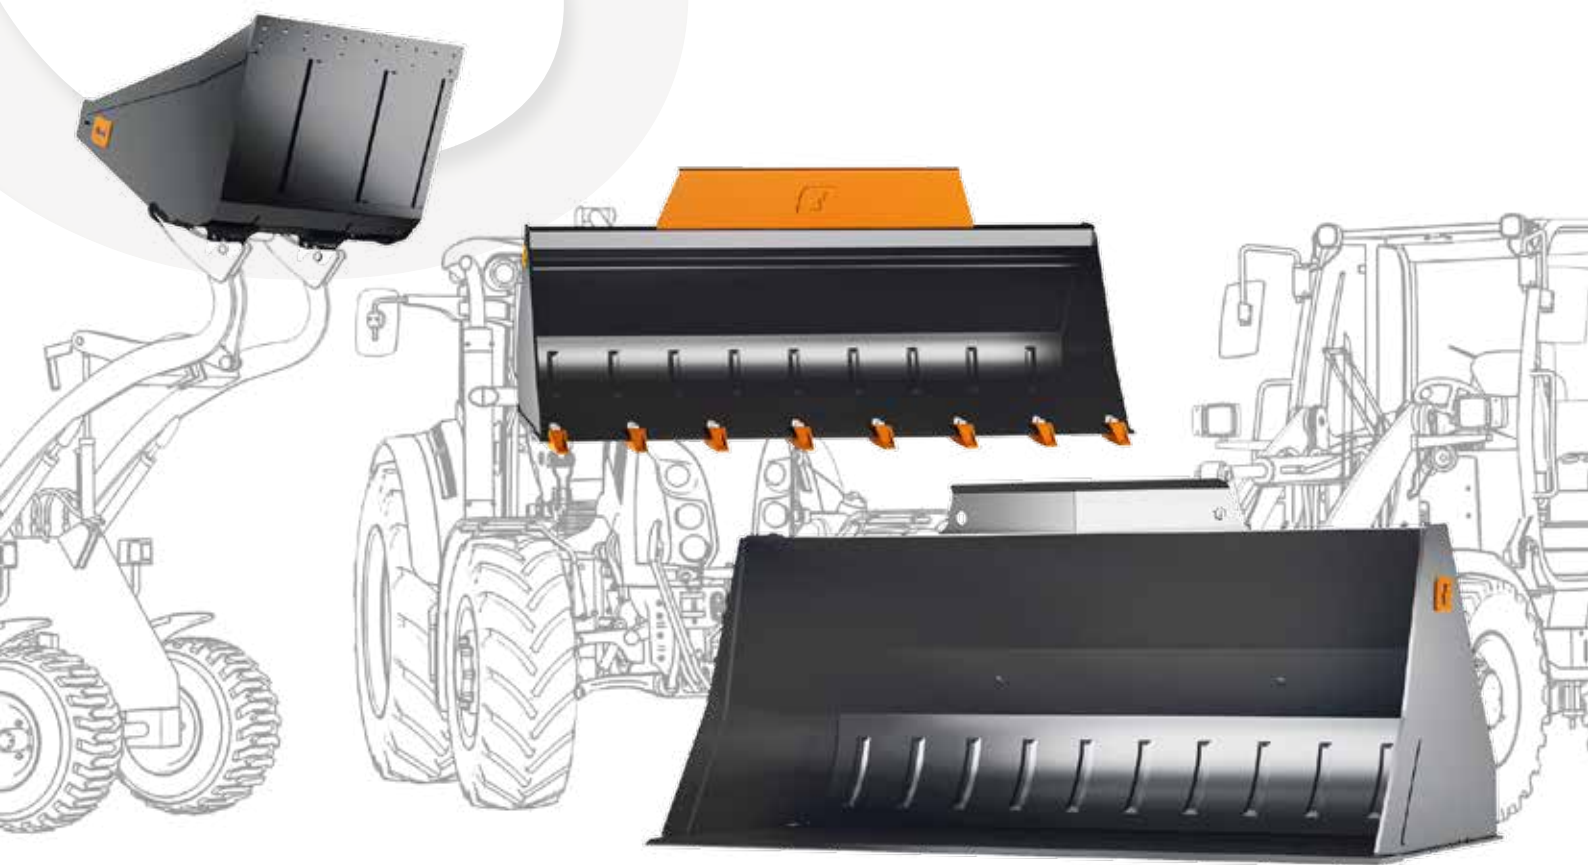

SXL+		140	160	180	200	220	240	260	265	275	295
Width	cm									274	294
Depth	cm									129	129
Height	cm									133	133
Volume heaped	m³									2,50	2,70
Volume struck	m³									2,00	2,10
Weight (without BoH)	kg									1158	1216
SL+		140	160	180	200	220	240	260	265	275	295
Width	cm					219	239		264		
Depth	cm					105	105		120		
Height	cm					112	112		123		
Volume heaped	m³					1,30	1,40		2,00		
Volume struck	m³					1,00	1,10		1,60		
Weight (without BoH)	kg					634	669		789		
SM+		140	160	180	200	220	240	260	265	275	295
Width	cm		158	178	198	218	238	258			
Depth	cm		89	89	89	89	89	89			
Height	cm		75,5	75,5	75,5	75,5	75,5	75,5			
Volume heaped	m³		0,76	0,86	0,96	1,06	1,16	1,26			
Volume struck	m³		0,60	0,68	0,76	0,84	0,92	1,00			
Weight (without BoH)	kg		231	251	269	296	367	390			
SM		140	160	185	210	220	240	260	265	275	295
Width	cm			186	211						
Depth	cm			70,5	70,5						
Height	cm			67,5	67,5						
Volume heaped	m³			0,60	0,68						
Volume struck	m³			0,48	0,55						
Weight (without BoH)	kg			179	222						




- Prepared for:
- 1 Bolt on reversible cutting edge
 - 2 Bolt on plastic cutting edge
 - 3 Bolt on serrated cutting edge
 - 4 Bolt on teeth
 - 5 Teeth protection
 - 6 Bolt on spill guard

SXL+

POWERFUL PREMIUM SOIL BUCKET PERFECT FOR WHEEL LOADERS

- Extremely strong and robust.
- Designed for heavy materials as gravel and soil.
- Available with various accessories and BoHs.

SXL+	275	295
Width (outside gables), cm	271	291
Depth (max. inside), cm	129	129
Height (max. inside), cm	133	133
Volume heaped, m³	2,50	2,70
Volume struck, m³	2,00	2,10
Weight, kg	1158*	1216*
Cutting edge WxD, mm	200x25	200x25




Available accessories:
Cutting edge HB500
Bucket teeth
Spill guard

SL+

POWERFUL PREMIUM SOIL BUCKET FOR WHEEL LOADERS AND LARGE FRONT END LOADERS

- Robust design that guarantees long service life.
- Designed for heavy materials as gravel and soils.
- Available with various accessories and BoHs.

SL+	220	240	265
Width (outside gables), cm	217	237	262
Depth (max. inside), cm	105	105	120
Height (max. inside), cm	112	112	123
Volume heaped, m³	1,30	1,40	2,00
Volume struck, m³	1,00	1,10	1,60
Weight, kg	634*	669*	789*
Cutting edge WxD, mm	200x20	200x20	200x20



Available accessories:
Cutting edge HB500
Bucket teeth
Spill guard

SM+

POWERFUL PREMIUM SOIL BUCKET FOR COMPACT WHEEL LOADERS AND FRONT END LOADERS

- Strong and versatile heavy material bucket.
- Ideal for Front loaders and compact wheel loaders.
- Available with various accessories and BoHs.

SM+	160	180	200	220	240	260
Width (outside gables), cm	158	178	198	218	238	258
Depth (max. inside), cm	89	89	89	89	89	89
Height (max. inside), cm	75,5	75,5	75,5	75,5	75,5	75,5
Volume heaped, m³	0,76	0,86	0,96	1,06	1,16	1,26
Volume struck, m³	0,60	0,68	0,76	0,84	0,90	1,00
Weight, kg	231*	251*	269*	296*	367*	390*
Cutting edge WxD, mm	150x18	150x18	150x18	150x18	200x18	200x18



Available accessories:
Cutting edge HB500
Cutting edge plastic
Cutting edge serrated
Bucket teeth
Spill guard



SM

A STRONG BUT STILL LIGHT SOIL BUCKET

- Ideal for heavy materials.
- Bucket design allows handling of heavy materials.
- Well suited for machines with limited rollback force.

SM	185	210
Width (outside gables), cm	186	211
Depth (max. inside), cm	70,5	70,5
Height (max. inside), cm	67,5	67,5
Volume heaped, m³	0,60	0,68
Volume struck, m³	0,48	0,55
Weight, kg	179**	222**
Cutting edge WxD, mm	150x16	150x16




* without Bolt on Hooks ** Euro

S Series Video!




BUCKET TYPE G

The farmers favorite – the general purpose bucket. This bucket type can be used for most of everyday work at the farm. The slight convex gable design allows good penetration into tougher materials while the long bucket bottom ensures maximum filling of the bucket – all to increase your productivity.

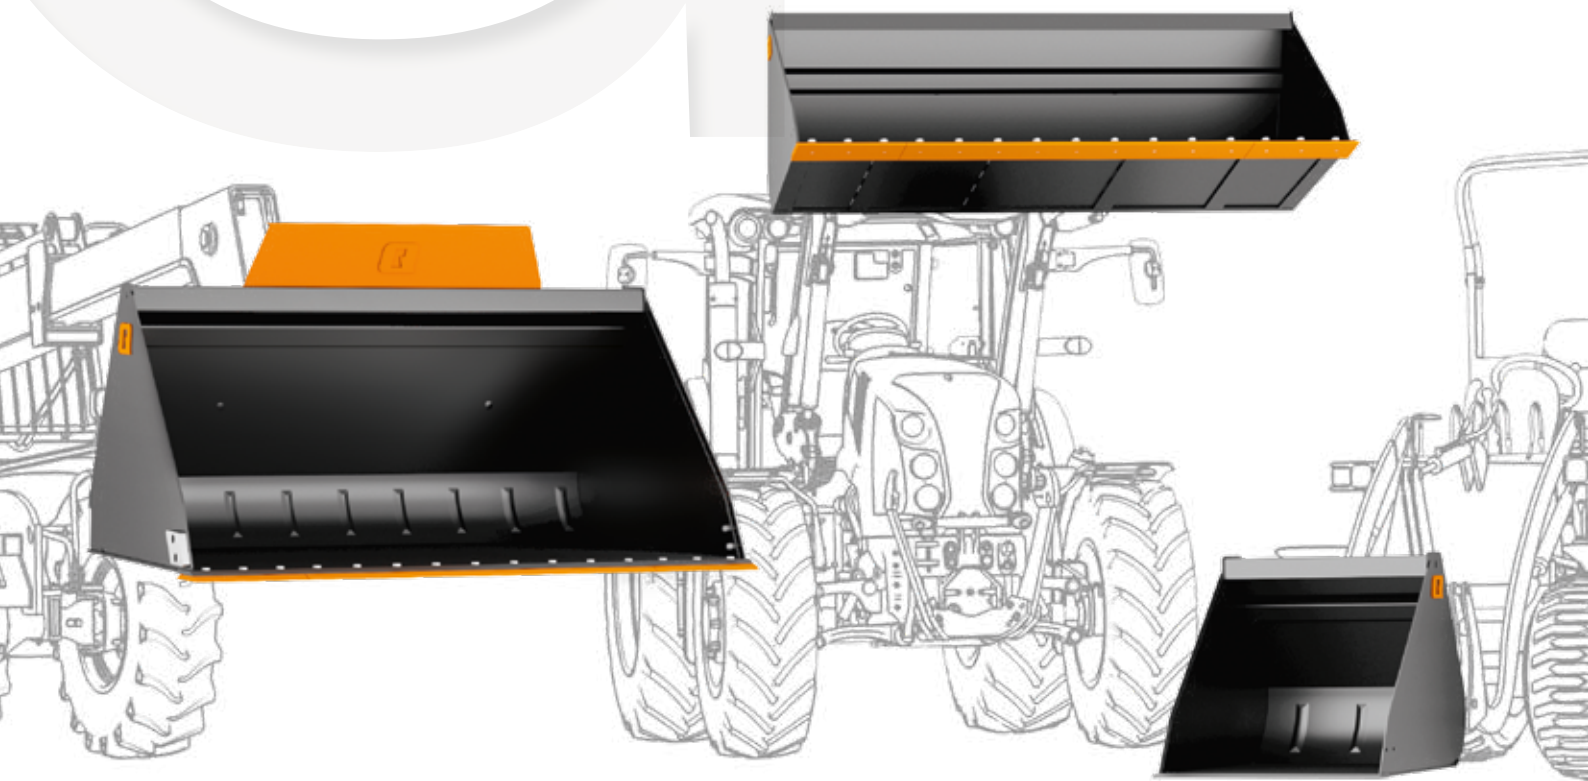

GXL +		90	100	120	140	160	180	200	220	240	260
Width	cm							198	218	238	258
Depth	cm							140	140	140	140
Height	cm							105	105	105	105
Volume heaped	m³							1,75	1,94	2,11	2,31
Volume struck	m³							1,40	1,55	1,69	1,85
Weight (without BoH)	kg							497	529	588	619
GL +		90	100	120	140	160	180	200	220	240	260
Width	cm						178	198	218	238	258
Depth	cm						128	128	128	128	128
Height	cm						94	94	94	94	94
Volume heaped	m³						1,23	1,40	1,55	1,71	1,90
Volume struck	m³						1,00	1,12	1,25	1,37	1,50
Weight (without BoH)	kg						420	448	473	529	588
GM +		90	100	120	140	160	180	200	220	240	260
Width	cm						178	198	218	238	
Depth	cm						104,5	104,5	104,5	104,5	
Height	cm						78	78	78	78	
Volume heaped	m³						1,02	1,14	1,27	1,40	
Volume struck	m³						0,81	0,90	0,99	1,09	
Weight (without BoH)	kg						300	324	357	380	
GS+		90	100	120	140	160	180	200	220	240	260
Width	cm	88	98	118	138	158					
Depth	cm	82,5	82,5	82,5	82,5	82,5					
Height	cm	64,5	64,5	64,5	64,5	64,5					
Volume heaped	m³	0,32	0,36	0,44	0,53	0,61					
Volume struck	m³	0,26	0,29	0,36	0,42	0,48					
Weight (without BoH)	kg	108	116	135	180	197					
GM		90	100	120	140	165	190	215	245	240	260
Width	cm				138	163	188	213	243		
Depth	cm				81,5	81,5	81,5	81,5	81,5		
Height	cm				71,5	71,5	71,5	71,5	71,5		
Volume heaped	m³				0,54	0,65	0,72	0,82	0,95		
Volume struck	m³				0,45	0,54	0,60	0,69	0,79		
Weight (without BoH)	kg				146	165	205	251	293		
GS		90	100	120	135	160	185	200	220	240	260
Width	cm				137		187				
Depth	cm				78,4		78,4				
Height	cm				79		79				
Volume heaped	m³				0,51		0,60				
Volume struck	m³				0,40		0,71				
Weight (without BoH)	kg				126		166				



- Prepared for:
- 1 Bolt on reversible cutting edge
 - 2 Bolt on plastic cutting edge
 - 3 Bolt on serrated cutting edge
 - 4 Bolt on wall saver
 - 5 Bolt on spill guard



GXL+

PREMIUM GENERAL PURPOSE BUCKET FOR ALLROUND WORK

- Premium general purpose bucket for allround work.
- Ideal for telehandlers but works good with compact wheel loaders and large front end loaders.
- Available with various accessories and BoHs.

GXL+	200	220	240	260
Width (outside gables), cm	198	218	238	258
Depth (max. inside), cm	136,5	136,5	136,5	136,5
Height (max. inside), cm	101,5	101,5	101,5	101,5
Volume heaped, m³	1,75	1,94	2,11	2,31
Volume struck, m³	1,40	1,55	1,69	1,85
Weight, kg	497*	529*	588*	619*
Cutting edge WxD, mm	150x18	150x18	150x18	150x18



GL+

HIGHLY MODULAR GENERAL PURPOSE BUCKET FOR ALLROUND WORK

- Highly modular general purpose bucket for allround work.
- Ideal for telehandlers but works good with compact wheel loaders and large front end loaders.
- Available with various accessories and BoHs.

GL+	180	200	220	240	260
Width (outside gables), cm	178	198	218	238	258
Depth (max. inside), cm	124,5	124,5	124,5	124,5	124,5
Height (max. inside), cm	90,5	90,5	90,5	90,5	90,5
Volume heaped, m³	1,23	1,40	1,55	1,71	1,90
Volume struck, m³	1,00	1,12	1,25	1,37	1,50
Weight, kg	420*	448*	473*	529*	558*
Cutting edge WxD, mm	150x18	150x18	150x18	150x18	150x18




GM+

GENERAL PURPOSE BUCKET FOR SMALLER TELEHANDLERS, COMPACT WHEEL LOADERS AND LARGE FRONT LOADERS

- Conical shape and the straight gable design offers good penetration into tough materials.
- Ideal for telehandlers, compact wheel loaders and large front end loaders.
- Available with various accessories and BoHs.

GM+	180	200	220	240
Width (outside gables), cm	178	198	218	238
Depth (max. inside), cm	104,5	104,5	104,5	104,5
Height (max. inside), cm	78	78	78	78
Volume heaped, m³	1,02	1,14	1,27	1,40
Volume struck, m³	0,81	0,90	0,99	1,09
Weight, kg	300*	324*	357*	380*
Cutting edge WxD, mm	150x18	150x18	150x18	150x18

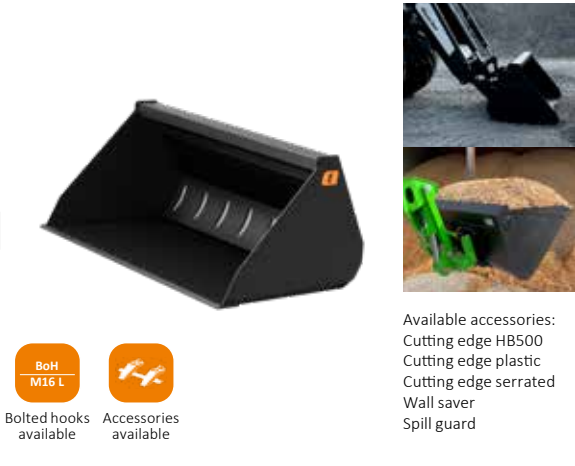


GS+

PREMIUM GENERAL PURPOSE BUCKET FOR ALLROUND WORK

- Designed for yard loaders and small compact wheel loaders.
- Available with various accessories and Bolt On Hooks.

GS+	90	100	120	140	160
Width (outside gables), cm	88	98	118	138	158
Depth (max. inside), cm	82,5	82,5	82,5	82,5	82,5
Height (max. inside), cm	64,5	64,5	64,5	64,5	64,5
Volume heaped, m³	0,32	0,36	0,44	0,53	0,61
Volume struck, m³	0,26	0,29	0,36	0,42	0,48
Weight, kg	108*	116*	134,5*	180,5*	197*
Cutting edge WxD, mm	100x14	100x14	100x14	150x14	150x14

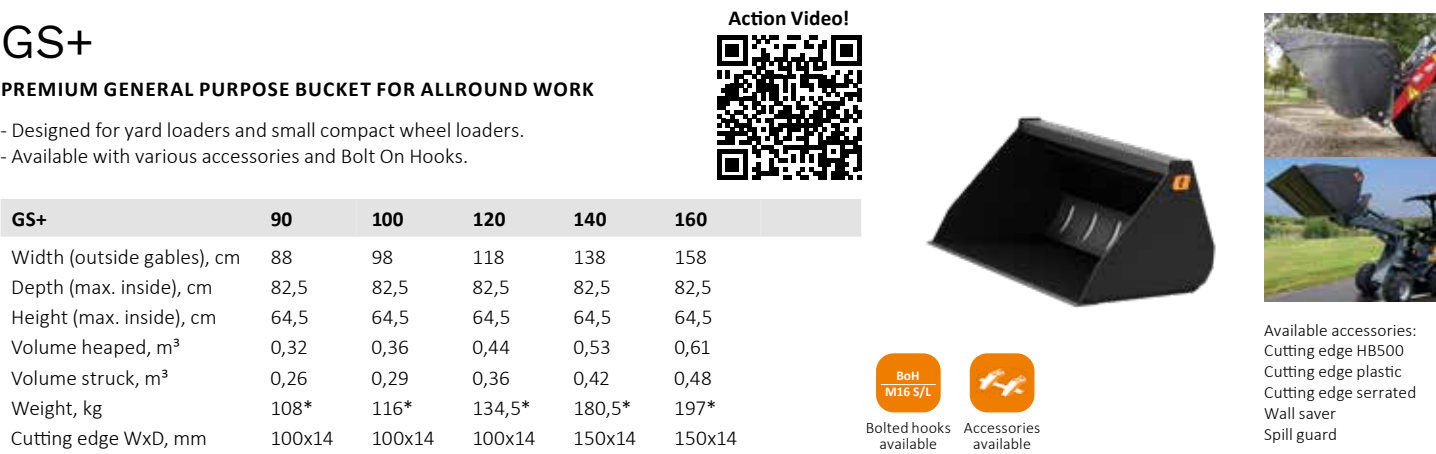

* without Bolt on Hooks ** Euro

GM

GENERAL PURPOSE BUCKET PERFECT FOR FRONT END LOADER USE

- Ideal for front end loaders.
- Highly versatlle.
- Easy to fill and to empty.

GM	140	165	190	215	245
Width (outside gables), cm	138	163	188	213	243
Depth (max. inside), cm	81,5	81,5	81,5	81,5	81,5
Height (max. inside), cm	71,5	71,5	71,5	71,5	71,5
Volume heaped, m³	0,54	0,65	0,72	0,82	0,95
Volume struck, m³	0,45	0,54	0,60	0,69	0,79
Weight, kg	146**	165**	205**	251**	293**
Cutting edge WxD, mm	150x14	150x14	150x14	150x14	150x18



GS

A VERSATILE AND LIGHT GENERAL PURPOSE BUCKET

- A lighter version of the GM bucket.
- Highly versatile.
- Well suited for lighter tasks.

GS	135	185
Width (outside gables), cm	137	187
Depth (max. inside), cm	78,4	78,4
Height (max. inside), cm	79	79
Volume heaped, m³	0,51	0,71
Volume struck, m³	0,40	0,60
Weight, kg	126**	166**
Cutting edge WxD, mm	100x12	100x12




* without Bolt on Hooks ** Euro



BUCKET TYPE V

When handling large volumes of low to medium density materials, the Quicke volume bucket is your best choice. The heavy convex gable design in combination with the large volume ensures maximum filling and prevents spillage of loose materials.

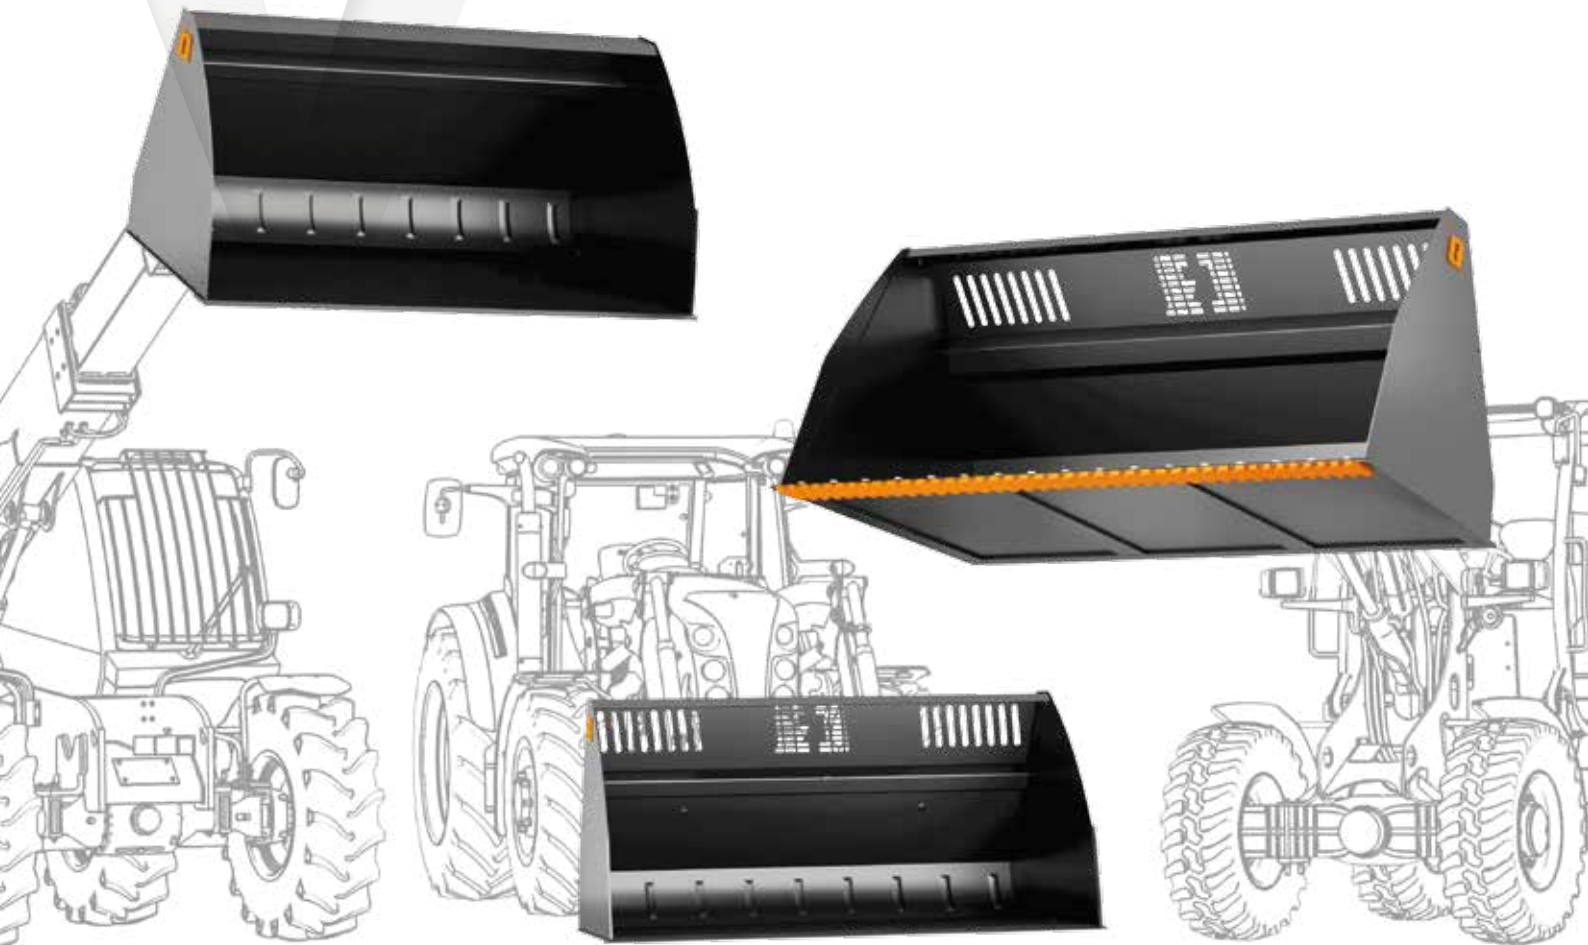

VXL+		90	100	120	140	160	180	200	220	245	265	285	305
Width	cm									248	265	289	309
Depth	cm									158	158	172	172
Height	cm									124	124	133	147
Volume heaped	m³									3,00	3,20	4,00	5,00
Volume struck	m³									2,40	2,60	3,20	4,00
Weight (without BoH)	kg									769	805	1134	1336
VL+		90	100	120	140	160	180	200	220	240	260	285	305
Width	cm							200	220	240	260		
Depth	cm							177	177	177	177		
Height	cm							118	118	118	118		
Volume heaped	m³							2,40	2,70	3,00	3,30		
Volume struck	m³							2,00	2,20	2,40	2,60		
Weight (without BoH)	kg							655	693	732	770		
VM+		90	100	120	140	160	180	200	220	240	260	285	305
Width	cm						180	200	220	240	260		
Depth	cm						126	126	126	126	126		
Height	cm						108	108	108	108	108		
Volume heaped	m³						1,60	1,80	2,00	2,20	2,40		
Volume struck	m³						1,30	1,40	1,60	1,70	1,90		
Weight (without BoH)	kg						391	420	464	494	525		
VS+		90	100	120	140	160	180	200	220	240	260	285	305
Width	cm	88	98	118	138	158							
Depth	cm	97	97	97	97	97							
Height	cm	75	75	75	75	75							
Volume heaped	m³	0,43	0,47	0,59	0,70	0,81							
Volume struck	m³	0,35	0,39	0,47	0,56	0,64							
Weight (without BoH)	kg	118	131	157	185	211							
VL CLASSIC		90	100	120	140	160	180	205	225	245	260	285	305
Width	cm							204	224	245	260		
Depth	cm							104	104	109,5	109,5		
Height	cm							83	83	98	98		
Volume heaped	m³							1,16	1,28	1,70	1,85		
Volume struck	m³							0,97	1,06	1,42	1,54		
Weight (without BoH)	kg							292	317	466	499		
VM		90	100	120	140	160	180	205	225	245	260	285	305
Width	cm							204	224	245			
Depth	cm							104	104	109,5			
Height	cm							83	83	98			
Volume heaped	m³							1,16	1,28	1,70			
Volume struck	m³							0,97	1,06	1,42			
Weight (without BoH)	kg							292	317	466			
VS CLASSIC		90	100	120	140	160	180	200	220	240	260	285	305
Width	cm							202	222				
Depth	cm							101,5	101,5				
Height	cm							83	83				
Volume heaped	m³							1,13	1,25				
Volume struck	m³							0,95	1,04				
Weight (without BoH)	kg							219	235				



- Prepared for:
- 1 Bolt on reversible cutting edge
 - 2 Bolt on plastic cutting edge
 - 3 Bolt on serrated cutting edge
 - 4 Bolt on wall saver
 - 5 Bolt on spill guard
 - 6 Wood chips spill guard
 - 7 Grain handling sides



VXL+

OUR LARGEST VOLUME BUCKET DESIGNED SPECIFICALLY FOR WHEEL LOADERS

- Robust high capacity volume bucket for AG wheel loaders.
- Strong overall design and long service life.
- Available with various accessories and optimized Bolt On Hooks for increased productivity.

VXL+	245	265	285	305
Width, cm	248	265	289	309
Depth (max. inside), cm	158	158	172	172
Height (max. inside), cm	124	124	133	147
Volume heaped, m³	3,00	3,20	4,00	5,00
Volume struck, m³	2,40	2,60	3,20	4,00
Weight, kg	769*	805*	1134*	1336*
Cutting edge WxD, mm	150x20	150x20	150x25	200x25





Bolted hooks available



Accessories available

Available accessories:
Cutting edge HB500
Cutting edge plastic
Cutting edge serrated
Wall saver
Spill guard
HD cover for visitslots

VL+

ROBUST AND DURABLE VOLUME BUCKET TO GET THE MOST PRODUCTIVITY FROM YOUR TELEHANDLER

- High capacity volume bucket optimized for telehandlers.
- Design of the bucket and the M24 Bolt on Hook system ensures a optimal fill ratio on most handler brands.
- Available with accessories that makes it specialized for both grain and woodchip handling.

VL+	200	220	240	260	
Width, cm	200	220	240	260	
Depth (max. inside), cm	177	177	177	177	
Height (max. inside), cm	118	118	118	118	
Volume heaped, m³	2,40	2,70	3,00	3,30	
Volume struck, m³	2,00	2,20	2,40	2,60	
Weight, kg	655*	693*	732*	770*	
Cutting edge WxD, mm	150x20	150x20	150x20	150x20	





Bolted hooks available



Accessories available


Available accessories:
Cutting edge HB500
Cutting edge plastic
Cutting edge serrated
Wall saver
Spill guard
HD cover for visitslots
Wood chips spill guard (1)
Grain handling sides (2)

VM+

A STRONG BUILT VOLUME BUCKET FOR LIGHTER MATERIALS

- Light materials bucket for grains, woodchips and snow.
- Perfect for Compact wheel loaders and large front loaders.
- Available with accessories and BoHs to most brands.

VM+	180	200	220	240	260
Width, cm	180	200	220	240	260
Depth (max. inside), cm	126	126	126	126	126
Height (max. inside), cm	108	108	108	108	108
Volume heaped, m³	1,60	1,80	2,00	2,20	2,40
Volume struck, m³	1,30	1,40	1,60	1,70	1,90
Weight, kg	391**	420**	464**	494**	525**
Cutting edge WxD, mm	150x20	150x20	150x20	150x20	150x20





Bolted hooks available



Accessories available

Available accessories:
Cutting edge HB500
Cutting edge plastic
Cutting edge serrated
Wall saver
Spill guard
HD cover for visitslots
Wood chips spill guard (1)

VS+

LIGHT MATERIALS BUCKET FOR LIGHT MATERIAL HANDLERS

- Light materials bucket.
- Designed for yard loaders and small compact wheel loaders.
- Available with various accessories and Bolt on Hooks.

VS+	90	100	120	140	160
Width, cm	88	98	118	138	158
Depth (max. inside), cm	97	97	97	97	97
Height (max. inside), cm	75	75	75	75	75
Volume heaped, m³	0,43	0,47	0,59	0,70	0,81
Volume struck, m³	0,35	0,39	0,47	0,56	0,64
Weight, kg	118*	131*	157*	185*	211*
Cutting edge WxD, mm	100x14	100x14	100x14	150x14	150x14





Bolted hooks available



Accessories available


(M16 L hook recommended on 140 and 160)
Available accessories:
Cutting edge HB500
Cutting edge plastic
Cutting edge serrated
Wall saver
Spill guard

VL Classic

A STRONG BUILT VOLUME BUCKET FOR LIGHTER MATERIALS

- Sturdy light material bucket.
- Well proven design.
- Ideal for snow removal with e.g. front end loaders.

VL CLASSIC	205	225	245	260
Width, cm	204	224	245	260
Depth (max. inside), cm	104	104	109,5	109,5
Height (max. inside), cm	83	83	98	98
Volume heaped, m³	1,16	1,28	1,70	1,85
Volume struck, m³	0,97	1,06	1,42	1,54
Weight, kg	292**	317**	466**	499**
Cutting edge WxD, mm	150x14	150x14	200x18	200x18





Welded hooks available

VM

LIGHT MATERIAL BUCKET WITH HIGH VOLUME CAPACITY

- High volume capacity.
- Perfect for grains and wood chips.
- Good match for front end loaders and compact wheel loaders.

VM	205	225	245
Width, cm	204	224	245
Depth (max. inside), cm	104.5	104.5	109.5
Height (max. inside), cm	98	98	98
Volume heaped, m³	1.60	1.70	2.00
Volume struck, m³	1.10	1.20	1.45
Weight, kg	341**	366**	417**
Cutting edge WxD, mm	150x14	150x14	200x18

* without Bolt on Hooks

** Euro





Welded hooks available

VS Classic


A COMPETITIVE BUCKET MADE FOR LIGHT MATERIALS

- Competitive and light design.
- Ideal for light materials as grain.

VS CLASSIC	200	220
Width, cm	202	222
Depth (max. inside), cm	101,5	101,5
Height (max. inside), cm	83	83
Volume heaped, m³	1,13	1,25
Volume struck, m³	0,95	1,04
Weight, kg	219**	235**
Cutting edge WxD, mm	100x14	100x14

* without Bolt on Hooks

** Euro





Welded hooks available




COMPACT & UTILITY BUCKETS

U Bucket

A UNIVERSAL BUCKET DESIGNED FOR SMALL FRONT END LOADERS

- Designed for lighter material handlers.
- Simple, robust and competitive.

U BUCKET	185 U	215 U
Width, cm	185	215
Depth (max. inside), cm	74,6	74,6
Height (max. inside), cm	61	61
Volume heaped, m³	0,57	0,68
Volume struck, m³	0,47	0,55
Weight, kg	173**	196**

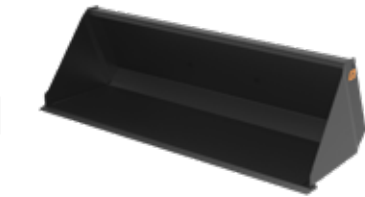

Euro Skid steer
Welded hooks available

Compact Bucket C with Euro

STANDARD BUCKET SPECIALLY DESIGNED FOR COMPACT TRACTOR LOADERS WITH EURO QUICK ATTACH.

- Standard bucket for compact tractor loaders.
- Design optimized for Euro quick attach.

CS/CM/CL BUCKET	120 CS	135 CS	150 CM	130 CL	150 CL	170 CL
Width, cm	124	139	154	134	154	174
Depth (max. inside), cm	54	54	54	66,5	66,5	66,5
Height (max. inside), cm	50	50	55	62	62	62
Volume heaped, m³	0,20	0,23	0,29	0,34	0,39	0,44
Volume struck, m³	0,15	0,17	0,22	0,28	0,32	0,36
Weight, kg	69**	76**	91**	99**	110**	121**



Euro
Welded hooks available

Compact Bucket C with Skid Steer

STANDARD BUCKET SPECIALLY DESIGNED FOR COMPACT TRACTOR LOADERS WITH SKID STEER QUICK ATTACH.

- Standard bucket for compact tractor loaders.
- Design optimized for Skid steer quick attach.

C3/C2 BUCKET	120 C3	135 C3	155 C2	170 C2	185 C2
Width, cm	124	139	157	172	187
Depth (max. inside), cm	44	44	53	53	53
Height (max. inside), cm	48	48	53	53	53
Volume heaped, m³	0,17	0,19	0,28	0,3	0,33
Volume struck, m³	0,14	0,15	0,21	0,25	0,27
Weight, kg	65	70	103	111	118



Skid steer
Welded hooks available
** Euro



SPECIAL BUCKETS

Multi Purpose Bucket

THE VERSATILE AND ROBUST TOOL FOR MATERIAL HANDLING

- Versatile multipurpose bucket.
- Digging, grabbing, grading and bottom emptying.
- Robust design ideal for front loaders.

MULTI PURPOSE BUCKET	160 MP	185 MP	210 MP	160 MPT	185 MPT	210 MPT
Width, cm	161,6	186,6	211,6	161,6	186,6	211,6
Depth (max. inside), cm	67	67	67	67	67	67
Height (max. inside), cm	67,5	67,5	67,5	67,5	67,5	67,5
Volume heaped, m³	0,48	0,56	0,66	0,48	0,56	0,66
Volume struck, m³	0,38	0,44	0,50	0,38	0,44	0,50
Weight, kg	368**	401**	434**	373**	407**	441**
Cutting edge WxD, mm	150x16	150x16	150x16	150x16	150x16	150x16



Euro
Welded hooks available
MP = without teeth
MPT = with teeth

Multi Purpose Utility Bucket

VERSATILE IMPLEMENT FOR MATERIAL HANDLING

- Versatile Implement used for many different applications.
- 4-in-1 bucket with size and capacity to suit medium size front loaders.
- All models are available with Euro and Skid steer hooks.

MULTI PURPOSE UTILITY	160 MPU	185 MPU	210 MPU
Width, cm	162	187	212
Depth (max. inside), cm	54	54	54
Height (max. inside), cm	60	60	60
Volume heaped, m³	0,40	0,47	0,53
Volume struck, m³	0,32	0,37	0,42
Weight, kg	264**	291**	318**



Euro Skid steer
Welded hooks available

Multi Purpose Compact Bucket

MULTI PURPOSE (ALSO CALLED 4-IN-1 BUCKET) BUCKET FOR COMPACT TRACTORS

- Maximum versatlity.
- Designed for compact tractors.

MULTI PURPOSE COMPACT	140 MPC	170 MPC	180 MPC
Width, cm	137	167	182
Depth (max. inside), cm	40,8	40,8	40,8
Height (max. inside), cm	44	44	44
Volume heaped, m³	0,21	0,25	0,28
Volume struck, m³	0,16	0,19	0,21
Weight, kg	155**	177**	187**



Euro Skid Steer
Welded hooks available

** Euro

High Tip Bucket XH M+

ALLOWS TIPPING AT A HIGHER LEVEL

- Increases loading height by 2,2m.
- Designed for handling low density materials as wood chips and grains.
- Well suited for front loaders and compact wheel loaders.

HIGH TIP BUCKET	160	180	200	220	240	260
Width, cm	161	181	201	221	241	261
Depth (max. inside), cm	117,3	117,3	117,3	117,3	117,3	117,3
Height (max. inside), cm	104,5	104,5	104,5	104,5	104,5	104,5
Volume heaped, m³	1,4	1,51	1,75	1,96	2,18	2,40
Volume struck, m³	1,2	1,37	1,52	1,64	1,86	2,08
Weight, kg	481*	514*	566*	600*	635*	669*
Cutting edge WxD, mm	180x16	180x16	180x16	180x16	180x16	180x16



Special Clearing Bucket SC M+

THE PROFESSIONAL SNOW CLEARING IMPLEMENT FOR AG TRACTORS AND COMPACT WHEEL LOADERS

- Professional snow clearing.
- Reinforced and improved flaps for increased productivity.
- Available with M16 L BoH system and unique accessories such as snow plough wing.

SPECIAL CLEARING BUCKET	230
Width, cm	230
Width max., cm	392
Depth (max. inside), cm	109
Height (max. inside), cm	98
Volume heaped, m³	1,41
Volume struck, m³	1,14
Weight, kg	660*
Cutting edge WxD, mm	200x20




* without Bolt on Hooks ** Euro



Old design on gable plates.
In the current design the gable plates are convex.

XH High Tip Bucket

Well suited for front loaders, increases the loading height with more than 2.2m.

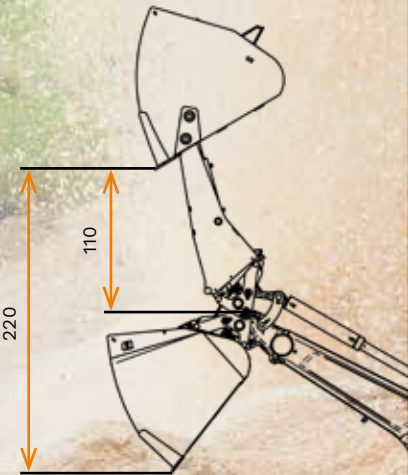

Grading Bucket XL

THE LARGER AND HEAVIER VERSION OF OUR POPULAR GRADING BUCKET

- All-round bucket.
- Optional spill guard.
- Optional bucket extension.

GRADING BUCKET XL	220 XL	240 XL	260 XL	280 XL	300 XL
Width (outside gables), cm	220,6	242,6	262,5	282,8	302,4
Depth (max. inside), cm	118	118	137,5	137,5	152,5
Height (max. inside), cm	54,5	54,5	54,5	54,5	54,5
Volume heaped, m³	1,05	1,15	1,56	1,69	1,97
Volume struck, m³	0,79	0,87	1,14	1,23	1,40
Weight, kg	646	683	900	945	1151
Cutting edge WxD, mm	200x20	200x20	200x25	200x25	250x30



Available accessories:
Spill guard
Bucket extension

Grading Bucket

WHEN GRADING AND LEVELLING, THIS IS THE PROFESSIONALS CHOICE

- Low back and long bottom.
- Cutting edge in the back.
- Cutting edge is in good view of the operator.

GRADING BUCKET	180	200	220	240
Width, cm	184	204	224	244
Depth (max. inside), cm	109	109	109	109
Height (max. inside), cm	48	48	48	48
Volume heaped, m³	0,62	0,70	0,78	0,86
Volume struck, m³	0,44	0,49	0,52	0,58
Weight, kg	282	308	333	402
Cutting edge WxD, mm	150x18	150x18	150x18	200x18



Grading Bucket S

A GRADING BUCKET DESIGNED FOR YARD LOADERS AND COMPACT WHEEL LOADERS

- Ideal for yard loaders.
- Available with most common yard loader hook types.
- Snow extension available as accessory.

GRADING BUCKET S	100	120	140	160
Width (outside gables), cm	98	118	138	158
Depth (max. inside), cm	83	83	83	83
Height (max. inside), cm	40	40	40	40
Volume heaped, m³	0,22	0,275	0,33	0,385
Volume struck, m³	0,153	0,186	0,219	0,252
Weight*, kg	110	125	160	177
Cutting edge WxD, mm	100x14	100x14	100x14	100x14



Available accessories:
Bucket extension

Precision Bucket

ALLOWS PIN POINT ACCURACY

- Releases material with high precision.
- Two available variants, both conical and straight.
- Cutting edge is in good view of the operator.

PRECISION BUCKET	200 PS	200 PC	250 PS	250 PC
Width, cm	115	55/115	115	87/115
Depth (max. inside), cm	199	199	249	249
Height (max. inside), cm	62	62	76	76
Volume heaped, m³	0,93	0,87	1,69	1,54
Volume struck, m³	0,87	0,71	1,55	1,40
Weight, kg	302	271	577**	566**
Cutting edge WxD, mm	150x16	150x16	200x20	200x20




* depending on hook ** Only Volvo BM Large

Stone Fork XL+

PICK UP, CLEAN AND TRANSPORT STONES

- Robust stone fork with improved design.
- Size and capacity well suited for large AG wheel loaders.
- Optional prying fork for picking up deeper buried stones.

STONE FORK XL+	230	255	280
Width, cm	231,5	255,5	279,5
Depth, cm	164	164	164
Height, cm	93,5	93,5	93,5
Number of tines	20	22	24
Tines profile width in front, mm	35	35	35
Distance round profile, mm	80	80	80
Strength round profile, mm	40	40	40
Weight, kg	854	925	995

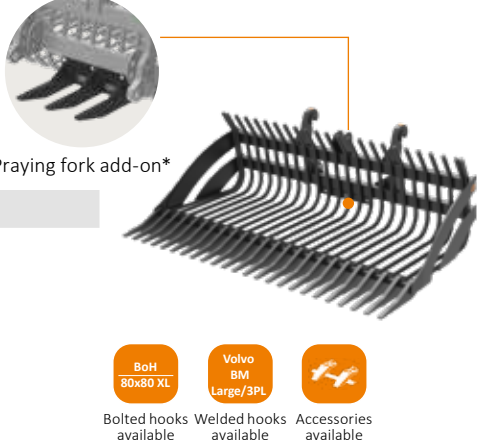

Available accessories:
Prying fork
3-point-linkage attachment

Stone Fork M+

PICK UP, CLEAN AND TRANSPORT STONES

- Available in three widths suitable for front loaders and compact wheel loaders.
- Mounted at the front end are hardened tines which point slightly downwards.
- Available with all common AG loader attachments and 3-point hitch.

STONE FORK M+	155	200	225
Width, cm	156,5	200,5	222,5
Depth, cm	111	111	111
Height, cm	85	85	85
Number of tines	15	19	21
Tines profile width in front, mm	25	25	25
Distance round profile, mm	80	80	80
Strength round profile, mm	30	30	30
Weight, kg	257	318	348



Available accessories:
3-point-linkage attachment

* Bolted accessory for digging up large stones with Stone Fork XL+.
Note: Prying fork compability is dependent on loader boom and tilt mechanism design.
For example telehandlers with central boom and loaders with low position of cross tube may interfere with prying fork during dump out.
Carefully check for collisions before use.





MANURE & SILAGE

We have had seven decades to perfect our manure and silage implements. We have spent those years adjusting and fine tuning, learning that results are in the details. It has been about finding the perfect spacing of tines that will eliminate spillage, finding the cutting knives that gives the cleanest cut and the best shape of shells. But beyond details we have the big picture. For what you see is what you get - innovative silage implements that make you work more effectively and reduces handling time.



HENRIK JÖNSSON
PRODUCT MANAGER IMPLEMENTS


“We pride ourselves on the strength, quality and durability of our products, and the manure and silage implements are no different. We tirelessly continue to work to complement our offer, perfecting details, both in terms of large and small implements, for all kinds of machines.”

Powergrab XL+

HIGH CAPACITY BUCKET GRAB DESIGNED FOR SILAGE HANDLING WITH LARGE TELEHANDLERS AND WHEEL LOADERS

- Bucket grab for silage handling.
- For use with 5 - 10 tons lift capacity material handlers.
- Compatible with Z-link loaders.

POWERGRAB XL+	240	260	280	295
Width, cm	245	260	280	300
Depth, cm	116	116	116	116
Volume, m³	2,45	2,65	2,85	3,00
Max. opening, cm	213	213	213	213
Weight, kg	1336	1380	1425	1458
Cutting edge WxD, mm	200x20	200x20	200x20	200x20



Available accessories:
Cutting edge HB500
Pressure relief valve
Load-hold valve


Powergrab L+

EFFICIENT BUCKET GRAB DESIGNED FOR SILAGE HANDLING WITH LARGE FRONT LOADERS, TELEHANDLERS AND WHEEL LOADERS

- Bucket grab for Silage handling.
- For use with 4 - 5,5 tons lift capacity material handlers.
- Compatible with Z-link loaders.

POWERGRAB L+	200	220	240	260
Width, cm	200	220	240	260
Depth, cm	100	100	100	100
Volume, m³	1,60	1,75	1,95	2,10
Max. opening, cm	200	200	200	200
Weight, kg	917	957	1060	1097
Cutting edge WxD, mm	200x20	200x20	200x20	200x20

Action Video!




Available accessories:
Cutting edge HB500
Pressure relief valve
Load-hold valve

Powergrab M+

HIGHLY PRODUCTIVE BUCKET GRAB FOR SILAGE HANDLING WITH MEDIUM SIZED HANDLERS

- Ideal for farms with high feeding rate of clamp silage.
- Powerful grab and solid bucket base makes it perfect for maize silage extraction.
- Designed for use with front loaders, compact wheel loaders and up to medium sized telehandlers.

POWERGRAB M+	165	180	200	220	240	260
Width, cm	165	180	200	220	240	260
Depth, cm	116	116	116	116	116	116
Volume, m³	1	1,1	1,2	1,3	1,4	1,5
Max. opening, cm	162	162	162	162	162	162
Weight (Single grab head)*, kg	553	583	615	656	755	777
Weight (Single grab head Euro), kg	-	-	610	651	750	-
Weight (Dual grab head)*, kg	-	-	-	-	748	768
Cutting edge WxD, mm	150x18	150x18	150x18	150x18	150x18	150x18



Available accessories:
Cutting edge HB500
Pressure relief valve
Load-hold valve



Silocut XL+

HIGH-CAPACITY SHEAR GRAB FOR CUTTING SILAGE FROM SILAGE CLAMP AND SPLITTING BALES

- High-capacity shear grab with tines or bucket.
- Cuts both silage and bales.
- Available with 80x80 XL BoH system and optional bale wrap handler and push out.

SILOCUT XL+	225	250
Working width, cm	225	250
Opening height total, cm	187-192	192
Opening, cm	125-128	125-128
Height total, cm	139	139
Depth inside until implement back, cm	84-86	84-86
No. of cylinders	2	2
Cylinder sizes	125/60	125/60
Volume, m³	2,4	2,7
No. of tines (forged, profiled)	15-18	17-20
Cutting edge WxD, mm (bucket)	220x20	220x20
Weight*, kg (forged)	1381	1498
Weight*, kg (profiled)	1469	1615
Weight*, kg (bucket)	1498	1632

Example pictures showing the three different variants:




F = Forged tine version P = Profiled tine version B = Bucket version

Available accessories:



Hydraulic push-out Bale wrap handler Sequencer valve



Available accessories:
Bale Wrap Handler
Hydraulic push-out
(for forged-/profiled tine version)
Pressure relief valve
Load-hold/Pressure relief valve
Sequencer Valve



Silocut L+

VERSATILE SHEAR GRAB FOR CUTTING SILAGE FROM SILAGE CLAMP AND SPLITTING BALES

- Versatile shear grab with tines or bucket.
- Cuts both silage and bales.
- Bale wrap handler and push out available as accessories.

SILOCUT L+	175	200	225	250
Working width, cm	175	200	225	250
Opening height total, cm	178-184	178-184	178-184	178-184
Opening, cm	126	126	126	126
Height total, cm	125	125	125	125
Depth inside until implement back, cm	83	83	83	83
No. of cylinders	2	2	2	2
Cylinder sizes	110/50	125/60	125/60	125/60
Volume, m³	1,4	1,6	1,8	2,0
No. of tines (forged, profiled)	14	16	18	20
Cutting edge WxD, mm (bucket)	150x18	150x18	150x18	150x18
Weight*, kg (forged)	924	994	1053	1122
Weight*, kg (profiled)	914	984	1041	1110
Weight*, kg (bucket)	979	1052	1110	1170

Example pictures showing the three different variants:





F = Forged tine version P = Profiled tine version B = Bucket version

Available accessories:



Hydraulic push-out Bale Wrap Handler Sequencer Valve

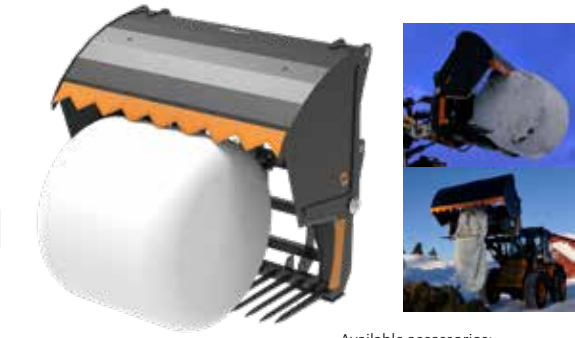

Available accessories:
Bale Wrap Handler
Hydraulic push-out
(for forged-/profiled tine version)
Pressure relief valve
Load-hold/Pressure relief valve
Sequencer Valve



Action Video!



Silocut M+

WELL PROVEN SHEAR GRAB SUITED FOR FRONT LOADERS, COMPACT WHEEL LOADERS AND MID-SIZE TELEHANDLERS

- Cuts cleanly in the silage clamp.
- Perfect size and capacity for front loaders, telehandlers and lighter wheel loaders.
- Features 80x80 Bolt on hooks and accessories.

SILOCUT M+ (F AND P VERSION)	125**	150	175	200	225
Working width, cm	125	150	175	200	225
Opening height total, cm	133	133	133	133	133
Opening, cm	77	77	77	77	77
Height closed, cm	95	95	95	95	95
Depth inside until implement back, cm	67	67	67	67	67
No. of cylinders	2	2	2	3	3
Cylinder sizes	90/40	100/50	110/50	90/40-100/50	100/50
Volume, m³	0,8	0,95	1,1	1,25	1,4
No. of tines	10	12	14	16	18
Weight*, kg (forged)	476	528	609	751	790
Weight*, kg (profiled)		507	595	720	759

Example pictures showing the two different variants:



F = Forged tine version P = Profiled tine version

Available accessories:



Silage backscreen Pressure relief valve



Available accessories:
Back screen
Hose kits
Pressure relief valve
Load-hold/Pressure relief valve



Sharp knives are key to high efficiency when working with silage. By having a clean cut, it prevents the admission of air and generation of heat, critical for feed quality. Should the knives lose their sharpness, they are – like every other part, big or small – easy to replace.

* without Bolt on Hooks

** Only available as forged tine version

* without Bolt on Hooks



Silocut Range Video!



Multigrab L+

MULTI-FUNCTIONAL BUCKET GRAB FOR MANURE, SILAGE AND WASTE HANDLING

- The ultimate solution for handling manure, silage, green waste and recyclables.
- Smart basic design and clever accessories takes your operations to the next level.
- Designed for use with front loaders, compact wheel loaders and up to medium sized telehandlers.

MULTIGRAB L+	200	220	240	260
Width, cm	200	220	240	260
Depth (max. inside), cm	121	121	121	121
Height (max. inside), cm	106	106	106	106
Volume, m³	1,30	1,45	1,60	1,75
Opening Height total, cm	162	162	162	162
Weight, kg	560	589	673	694

When handling logs or similar objects clamp edge or clamp bar must be assembled to prevent damage to tines.



Multigrab S+

A BUCKET GRAB FOR MANURE, SILAGE AND BULKY OBJECTS

- Multifunctional bucket grab for handling manure, silage and hard to handle objects.
- Smart basic design and clever accessories makes it perfect for both agriculture and forestry.
- Designed for yard loaders, small telehandlers and front loaders.

MULTIGRAB S+	120	140	160	180
Width, cm	120	140	160	180
Depth (max. inside), cm	96	96	96	96
Height (max. inside), cm	85	85	85	85
Volume, m³	0,52	0,62	0,71	0,81
Opening Height total, cm	130	130	130	130
Weight, kg	237	283	313	341

When handling logs or similar objects clamp edge or clamp bar must be assembled to prevent damage to tines.



Multigrab C for Compact Tractors

MULTI-FUNCTIONAL BUCKET GRAB FOR COMPACT TRACTORS

- Makes the most out of your compact tractor.
- Available with accessories such as clamp edge and bolt on gables.

MULTIGRAB C	CS 120	CM 140	CL 170*
Width, cm	121	137	170
Depth (max. inside), cm	46	53	53
Height (max. inside), cm	45	54	54
Volume, m³	0,22	0,34	0,42
Opening Height total, cm	91	107	107
Weight, kg	90	141**	161**

When handling logs or similar objects clamp edge must be assembled to prevent damage to tines.

* Only available with Euro
** Euro



Multigrab C Video!



Multibenne L+

A VERSATILE BUCKET GRAB FOR MANURE AND SILAGE DESIGNED PRIMARILY FOR TELEHANDLERS AND COMPACT WHEEL LOADERS WITH A LIFT CAPACITY UP TO 4,5 TONS

- Versatile bucket grab for manure & silage handling.
- Replaceable forged tines and cut out gables gives excellent penetration into tough manure.
- Bucket body allows handling of loose feed and liquids.

MULTIBENNE L+	200	220	240	260
Width, cm	200	220	240	260
Height, cm	107	107	107	107
Depth total, cm	123	123	123	123
Depth bucket, cm	88	88	88	88
Opening width, cm	167	167	167	167
Grabbed volume, m³	1,3	1,45	1,6	1,75
Weight, kg	556	600	671	704



Multibenne M+

A HIGHLY VERSATILE BUCKET GRAB FOR FRONT LOADERS, COMPACT WHEEL LOADERS AND UP TO MID-SIZE TELEHANDLERS

- Multi functional implement for silage and manure handling.
- Size and dimensions are ideal for use with front loaders, compact wheel loaders and up to mid-size telehandlers.
- Available with accessories and M16 L BoHs makes this implement available for various material handlers.

MULTIBENNE M+	170	190	210	230	250
Width, cm	170	190	210	230	250
Depth, cm	80	80	80	80	80
Number of tines	9	10	11	12	13
Volume, m³	0,86	0,96	1,07	1,17	1,27
Weight, kg	360	386	423	447	477



Multibenne S+

A VERSATILE BUCKET GRAB FOR LIGHTER MACHINES, ENGINEERED FOR EFFICIENT MANURE AND SILAGE HANDLING

- Versatile bucket grab for manure & silage handling.
- Replaceable hardened tines and cut out gables gives excellent penetration into tough manure.
- Design optimized for smaller AG tractors and Yard loaders.

MULTIBENNE S+	90	100	120	140	160	180	200	220
Width, cm	90	100	120	140	160	180	200	220
Depth, cm	67	67	67	67	67	67	67	67
Volume, m³	0,3	0,35	0,44	0,53	0,65	0,75	0,85	0,95
Number of tines	4	5	6	7	8	9	10	11
Weight, kg	146	156	176	196	244	269	287	309



Explanation Video!




Silograb L+

A VERSATILE FORK GRAB FOR MANURE AND SILAGE. DESIGNED PRIMARILY FOR TELEHANDLERS AND COMPACT WHEEL LOADERS WITH A LIFT CAPACITY UP TO 4,5 TONS.

- Versatile fork grab for handling manure and silage.
- Forged tines in grab and bottom gives maximum penetration into toughest manure.
- Bottom tines allows for picking up bales and hay.

SILOGRAB L+	200	220	240	260
Width, cm	200	220	240	260
Height, cm	107	107	107	107
Depth total, cm	123	123	123	123
Depth inside, cm	96	96	96	96
Opening width, cm	167	167	167	167
Grabbed volume, m³	1,3	1,45	1,6	1,75
Weight, kg	564	613	648	686




Available accessories:
Cylinder guard
Pressure relief valve
Load-hold valve

Silograb M+

A HIGHLY VERSATILE FORK GRAB FOR FRONT LOADERS, COMPACT WHEEL LOADERS AND UP TO MID-SIZE TELEHANDLERS

- Implement perfect for silage and manure handling.
- Size and dimensions are ideal for use with front end loaders, and compact wheel loaders.
- Available with M16 L BoHs allowing this implement to be used by many material handlers.

SILOGRAB M+	130	150	170	190	210	230	250
Width, cm	130	150	170	190	210	230	250
Depth, cm	85	85	85	85	85	85	85
Volume, m³	0,69	0,79	0,90	1,01	1,11	1,22	1,33
Number of tines	7+7	8+8	9+9	10+10	11+11	12+12	13+13
Weight, kg	250	270	300	320	355	377	405



Available accessories:
Pressure relief valve
Load-hold/Pressure relief valve


Silograb S+

A VERSATILE FORK GRAB FOR LIGHTER MACHINES, ENGINEERED FOR EFFICIENT MANURE AND SILAGE HANDLING

- Versatile fork grab for handling manure and silage.
- Replaceable hardened tines gives excellent penetration into tough manure.
- Design optimized Yard loaders and small tractors.

SILOGRAB S+	90	100	120	140
Width, cm	90	100	120	140
Depth, cm	67	67	67	67
Volume, m³	0,3	0,35	0,44	0,53
Number of tines	4+4	5+5	6+6	7+7
Weight*, kg	133	145	165	183

* without Bolt on Hooks



Available accessories:
Pressure relief valve


Multifork L+

A MULTIFUNCTIONAL FORK GRAB FOR MANURE, SILAGE, WASTE AND BULKY OBJECTS. DESIGNED PRIMARILY FOR TELEHANDLERS AND COMPACT WHEEL LOADERS WITH A LIFT CAPACITY UP TO 4,5 TONS

- Multifunctional fork grab for handling manure, silage, green waste and recyclables.
- Smart basic design and clever accessories makes it perfect for both agriculture and waste handling.
- Profile cut bottom tines gives best wear properties.

MULTIFORK L+	200	220	240	260
Width, cm	200	220	240	260
Height total, cm	115	115	115	115
Depth total, cm	123	123	123	123
Depth inside, cm	94	94	94	94
Opening width	164	164	164	164
Grabbed volume, m³	1,3	1,45	1,6	1,75
Weight, kg	628	662	716	745

When handling logs or similar objects clamp edge or clamp bar must be assembled to prevent damage to tines.



Available accessories:
Bolt on clamp bar
Bolt on clamp edge
Bolt on tine sleeves
Cylinder guard
Pressure relief valve
Load-hold valve


Multifork S+

A MULTIFUNCTIONAL FORK GRAB FOR MANURE, SILAGE, WASTE AND BULKY OBJECTS. DESIGNED FOR USE WITH SMALL SIZED TELEHANDLERS, YARD LOADERS AND SMALL FRONT LOADERS

- Multifunctional fork grab for handling manure, silage and bulky objects.
- Smart basic design and clever accessories makes it perfect for both agriculture and forestry.
- Designed for yard loaders, small telehandlers and front loaders.

MULTIFORK S+	110	130	150	170
Width, cm	115	135	155	175
Height total, cm	90	90	90	90
Depth total, cm	96	96	96	96
Depth inside, cm	81	81	81	81
Opening width	130	130	130	130
Grabbed volume, m³	0,52	0,62	0,71	0,81
Weight, kg	227	260	284	312

When handling logs or similar objects clamp edge or clamp bar must be assembled to prevent damage to tines.



Available accessories:
Bolt on clamp edge
Bolt on cylinder guard
Bolt on tine sleeves
Bolt on top guard
Pressure relief valve

Manure Fork L+

SIMPLE AND EFFECTIVE HANDLING OF MANURE AND OTHER SOFT MATERIALS SUCH AS GRASS AND HAY. DESIGNED PRIMARILY FOR TELEHANDLERS, AG TRACTORS AND COMPACT WHEEL LOADERS WITH A LIFT CAPACITY UP TO 4,5 TONS.

- Simple and effective handling of manure and other soft materials.
- Replaceable forged tines in bottom gives maximum penetration into manure and allows picking up bales and hay.
- Flexible M16 L BoHsystem makes it suited for telehandlers, compact wheel loaders and front loaders.

MANURE FORK L+	220	240	260
Width, cm	220	240	260
Height, cm	107	107	107
Depth total, cm	115	115	115
Depth inside, cm	96	96	96
Weight, kg	343	368	393



Manure Fork Range!



Manure Fork M+

SIMPLE HANDLING OF MANURE FOR FRONT END LOADERS, SMALL TO MID TELEHANDLERS AND COMPACT WHEEL LOADERS.

- Simple and effective handling of manure and other soft materials.
- Ideal for use with front end loaders, and compact wheel loaders.
- M16 BoH prepared.

MANURE FORK M+	130	150	170	190	230
Width, cm	130	150	170	190	230
Depth, cm	85	85	85	85	85
Number of tines, 820 mm	7	8	9	10	12
Weight, kg	123	136	152	165	203





BALE HANDLING

Our wide selection of bale handling equipment simplifies your work and makes you more productive. We offer a number of different tools for handling bales in different ways. You might want an implement that can handle both square and round bales or an implement that handles bales from the bottom and can deal with plastic bales as well as hay bales. Or why not an implement that splits bales? No matter your preconditions or desires, we have the right tool for you.



ERIC LENNARTSSON
MILK FARMER IN SWEDEN

This is Eric, one of our many test pilots. When we develop new implements, and improve our existing ones, we use farmers all over the world to test and verify the products. That way, we make sure that our products fulfil the needs of our customers on all our markets.

Unigrip L+ and XL+

UNIGRIP L+ AND XL+ ARE ENGINEERED FOR THE PROFESSIONAL FARMER AND CONTRACTOR TO PROVIDE GREAT PRODUCTIVITY THAT LASTS OVER TIME

- Robust Bale grab for the customer with highest demand on productivity.
- Ability to carry two bales at the time when using the 2nd bale back support.
- Best choice for bigger farms and contractors.

UNIGRIP L+ / XL+	L+	XL+
Bale size, cm	120-160	150-190
Min. – max. opening, cm	35-197	53-239
Height, cm	86	
Depth total (closed), cm	155	
Depth arm (closed - open), cm	113 - 107	135 - 107
Width total (closed), cm	146	141
Width back frame, cm	138	
Weight, kg	303	325

Pressure relief valve included as standard.



Unigrip S+ and M+

THE UNIGRIP S+ AND M+ BALE GRAB IS DESIGNED TO OFFER SUPERIOR PERFORMANCE IN STACKING BALES

- Well proven design with excellent bale stacking ability.
- Offers good grip of the bale without any damages to the silage or the wrap.
- Recommended for front loaders and lighter material handlers.

UNIGRIP S+ / M+	S+	M+
Bale size, cm	80-130	120-160
Min. – max. opening, cm	6-181	6-199
Height, cm	71	77
Depth total (closed), cm	132	144
Depth arm (closed - open), cm	95 - 88	107 - 95
Width back frame, cm	130	
Weight, kg	182	210




Quadrogrip TS®

THE BEST IMPLEMENT ON THE MARKET FOR HANDLING SQUARE AND ROUND BALES. TELESCOPIC DESIGN REDUCES SPACE NEEDED FOR HANDLING AND STACKING BALES

- Ideal for square bales in most sizes.
- Telescopic design makes it perfect in narrow spaces.
- Available with various accessories, e.g. bale support and load holding valve.

QUADROGRIP TS	110CM ARMS	135CM ARMS
Height, cm	53	53
Bale size, max., cm	210	209
Bale size, min., cm	61	60
Width total (closed), cm	202	202
Width total (open), cm	251	251
Depth total, cm	156	180
Weight, kg	440	453
Carrying capacity, kg	1500	1500

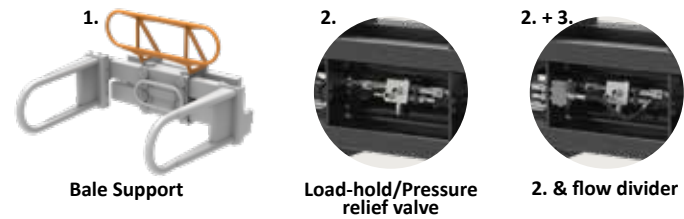


Topgrip

TOPGRIP PROPOSES A UNIQUE WAY OF HANDLING ROUND OR SQUARE BALES

- For round and square bales.
- No sharp edges, perfect for plastic bales.
- For re-handling bales that are stacked closely together.

TOPGRIP	120
Bale size min. – max., cm	100 – 150
Weight, kg	195

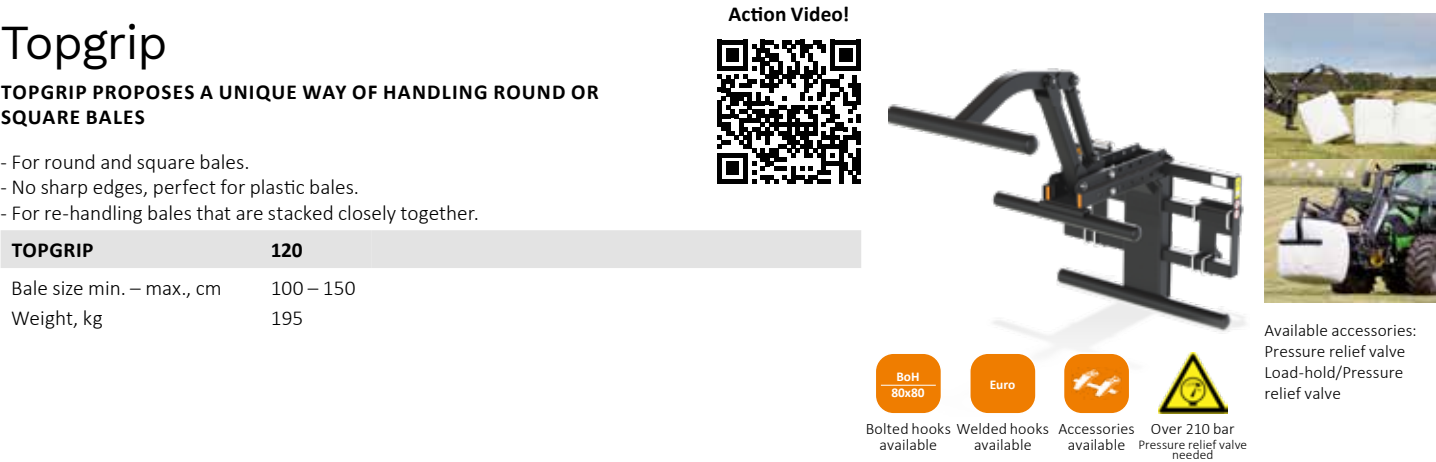


Flexibal®

FLEXIBAL IS A STRONG AND VERY FLEXIBLE IMPLEMENT

- With small or larger diameter rollers.
- Doubles as a bale fork when rollers are removed.
- Minimising risk of damage.

FLEXIBAL	89 MM PIPE PROFILE	127 MM PIPE PROFILE
Bale size min-max., cm	120-180	120-180
Weight, kg	195	195

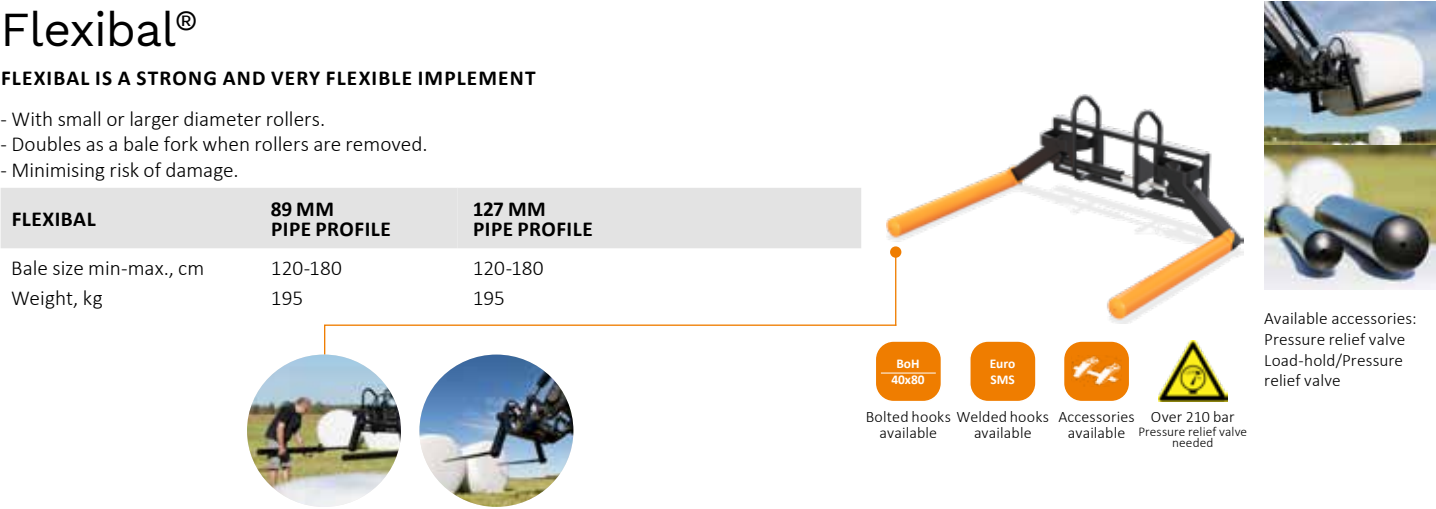

Balecut

BALECUT LETS YOU SPLIT BALES AND RETAIN THE WRAP - ALL WITHOUT LEAVING THE CABIN

- Specialized to cut round bales from 90 to 160 cm.
- Unique Bale Wrap Handler holds on to bale wrap disregarding density, shape or type of wrap.
- Available with a detachable bucket to handle loose feed and liquids.

BALECUT	185
Bale size, cm	90-160
Working width (between arms), cm	153
Height total (open), cm	173
Height total (closed), cm	91
Opening Height total, cm	144
Cylinder sizes, cm	110/50
No. of tines (forged conus 2)	5(+2)
Weight, kg	447

Available accessories:




Silosplit®

SPLITS AND TRANSPORTS BALES

- Easiest way of cutting bales.
- Can transport and split bales.
- Doubles as a bale spike.

SILOSPPLIT	120
Width, cm	120
Cutter length, cm	170
Weight, kg	110

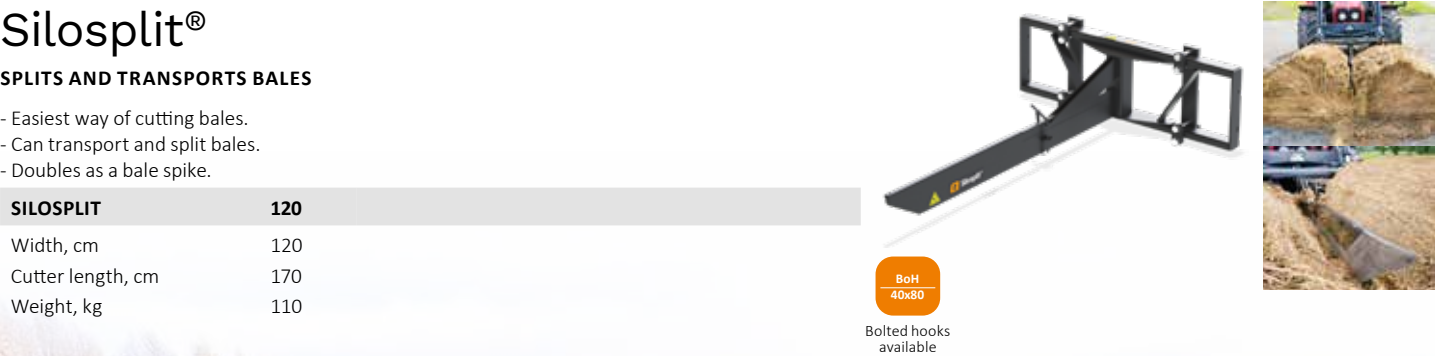



BALE FORKS

Our wide selection of bale handling equipment simplifies your work and makes you more productive. We offer a number of different tools for handling bales in different ways. No matter your preconditions or desires, we have the right tool for you.



HENRIK JÖNSSON
PRODUCT MANAGER IMPLEMENTS

As the responsible product manager for implement development I am always looking for ways to improve our bale handling equipment, to help our customers on their farms in the best possible way. This we assure through intensive field testing before our products are being launched on the market.

Bale Fork XL+ 200

FOR TRUE PROFESSIONAL USERS PROVIDING HIGHEST BALE CARRYING CAPACITY

- The professionals choice with highest capacity.
- Available with many accessories to further increase your productivity.
- Perfect for telehandlers and wheel loaders.

BALE FORK XL+ 200	200
Width, cm	200
Height, cm	176
Max. height with extensions/top beam, cm	187/295
Max. load capacity, kg	2500
No. of tines, Konus 2	Up to 5
Weight*, kg	157

* Weight without tines



- Bale Fork XL+ 200 has three settings:
1. Transport, tines locked in parallel with back frame.
 2. Free floating within slotted hole.
 3. Parking, tines locked 90° towards back frame.

Available tine sets:
Tine set 2 pieces: 82 cm / 124 cm
Tine set 3 pieces: 82 cm / 124 cm
Tine set 4 pieces: 82 cm / 124 cm
Tine set 5 pieces: 82 cm / 124 cm



Top grab has large working angle increasing its use. Since Top grab tines are curved they secure the stack of bales also when coming from the back.


Extension beams are required in order to use the Top grab accessory.

Thanks to the integrated design it works perfect also inside the bale shed. Top grab require extension beams and secures the stack of bales by pressing the upper bale downwards. This feature allows more safe and faster transport on the field to increase productivity.

Top grab can be adjusted in height depending on requested bale stack height and can be used to both penetrate bale from above or from the back.



- Available accessories:
- Extension beams
 - Top beam
 - Hydraulic control of foldable tines
 - Supporting tines to main frame
 - Top grab (Requires extension beams)
 - Teeth Protection

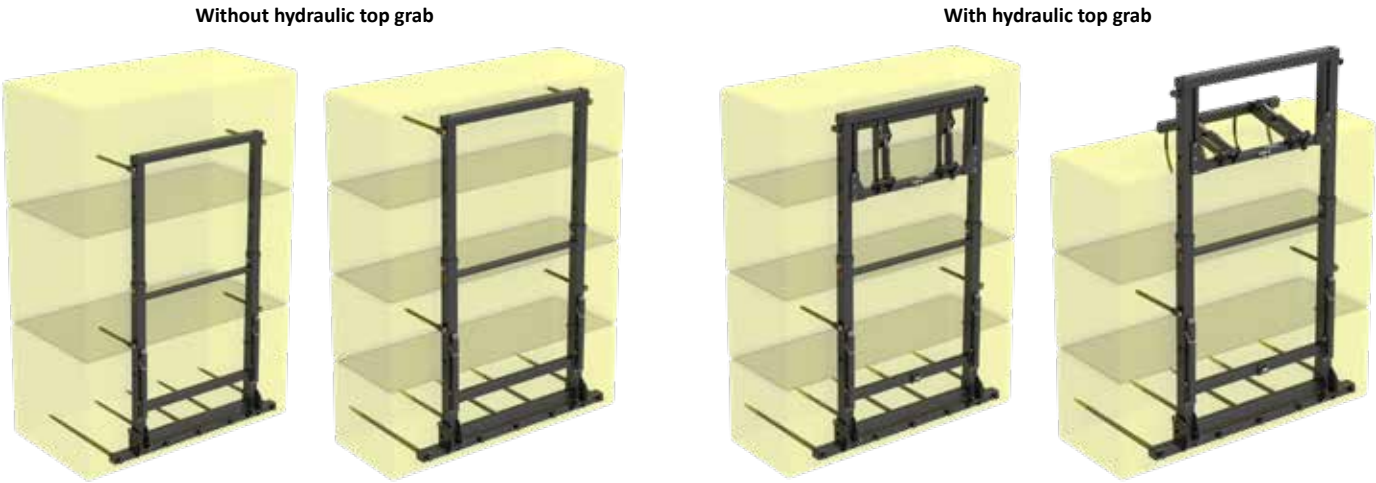



Bale Fork Range!



Bale Fork L 200

BALE FORK WITH HIGH CAPACITY IDEAL TO MOUNT EITHER ON FRONT- OR REAR 3-POINT HITCH, OR WHY NOT BOTH!

- Robust wide frame.
- Can be used for both round and square bales.
- Allows mounting to the tractors front and rear hitch of tractor as well to front loaders.

BALE FORK L 200	200
Width, cm	200
Height, cm	102
Max. load capacity, kg	2500
No. of tines, Cone 2	Up to 5
Weight*, kg	170

Available tine sets:
Tine set 2 pieces: 82 cm / 124 cm Tine set 4 pieces: 82 cm / 124 cm
Tine set 3 pieces: 82 cm / 124 cm Tine set 5 pieces: 82 cm / 124 cm



Bale Fork L+ 150 (fixed tines)

BALE FORK FOR THE FARMER WITH HIGH DEMAND ON EFFICIENCY

- High capacity bale fork with fixed tines.
- Available with accessories to further increase your productivity.
- Ideal for large front loaders, telehandlers and wheel loaders.

BALE FORK L+ 150 (FIXED TINES)	150
Width, cm	152,5
Height, cm	116,5
Max. height with extensions/top beam, cm	176/184
Max. load capacity, kg	2000
No. of tines, Cone 2	Up to 5
Weight*, kg	98,5

Available tine sets:
Tine set 2 pieces: 82 cm / 124 cm Tine set 4 pieces: 82 cm / 124 cm
Tine set 3 pieces: 82 cm / 124 cm Tine set 5 pieces: 82 cm / 124 cm

Action Video!



Bale Fork L+ 150 (folding tines)

BALE FORK FOR THE FARMER WITH HIGH DEMAND ON EFFICIENCY

- High capacity Bale fork with foldable tines.
- Available with accessories to further increase your productivity.
- Ideal for large front loaders, Telehandlers and Wheel loaders.

BALE FORK L+ 150 (FOLDED TINES)	150
Width, cm	152,5
Height, cm	116,5
Max. height with extensions/top beam, cm	176/184
Max. load capacity, kg	2000
No. of tines, Cone 2	Up to 5
Weight*, kg	122

Available tine sets:
Tine set 2 pieces: 82 cm / 124 cm Tine set 4 pieces: 82 cm / 124 cm
Tine set 3 pieces: 82 cm / 124 cm Tine set 5 pieces: 82 cm / 124 cm



* Weight without tines


Bale Fork M 180

BALE FORK WITH HIGHER CAPACITY AND WITH SUPPORT TO STACK AN ADDITIONAL BALE

- Wide frame with up to five Q-tines.
- High back frame provides stability for second bale.
- Welded Euro hooks makes it perfect for front loaders.

BALE FORK M 180	180
Width, cm	180
Height, cm	140
Max. load capacity, kg	2000
No. of tines, Cone 2	Up to 5
Weight*, kg	135

Available tine sets:
Tine set 2 pieces: 82 cm / 124 cm Tine set 4 pieces: 82 cm / 124 cm
Tine set 3 pieces: 82 cm / 124 cm Tine set 5 pieces: 82 cm / 124 cm

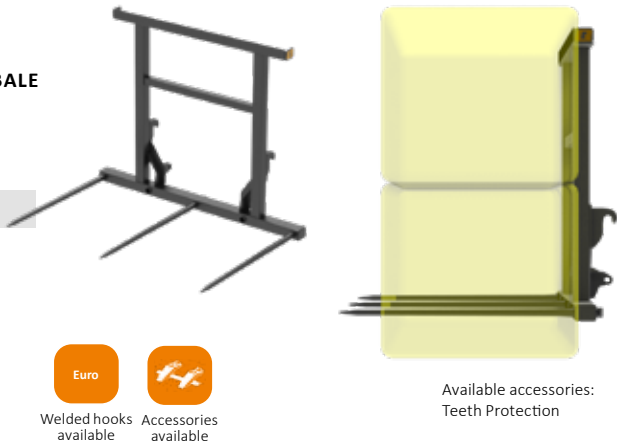


Bale Fork M 140

THE SIMPLE WAY OF HANDLING SQUARE AND ROUND BALES

- For transporting straw and hay bales.
- Can carry up to two bales.

BALE FORK M 140	140
Width, cm	140
Max. load capacity, kg	1500
No. of tines, Konus 2	Up to 5
Weight, kg	78

Available tine sets:
Tine set 2 pieces: 82 cm / 124 cm Tine set 4 pieces: 82 cm / 124 cm
Tine set 3 pieces: 82 cm / 124 cm Tine set 5 pieces: 82 cm / 124 cm

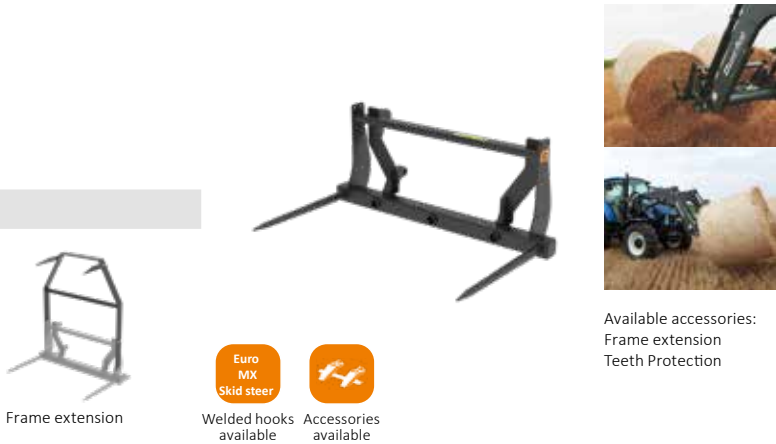

Bale Fork S+ 115 (fixed tines)


BALE FORK IDEAL FOR LIGHTER MATERIAL HANDLERS AND THANKS TO NARROW WIDTH ALSO SUITABLE INSIDE STABLES

- Simple and robust.
- Well suited for yard loaders and smaller front end loaders.
- Chose up to three Q-tines in different lengths.

BALE FORK S+ 115	115
Width, cm	115
Height, cm	100
Max. load capacity, kg	1000
No. of tines, Cone 2	Up to 3
Weight*, kg	98,5

Available tine sets:
Tine set 2 pieces: 82 cm / 124 cm
Tine set 3 pieces: 82 cm / 124 cm

* Weight without tines

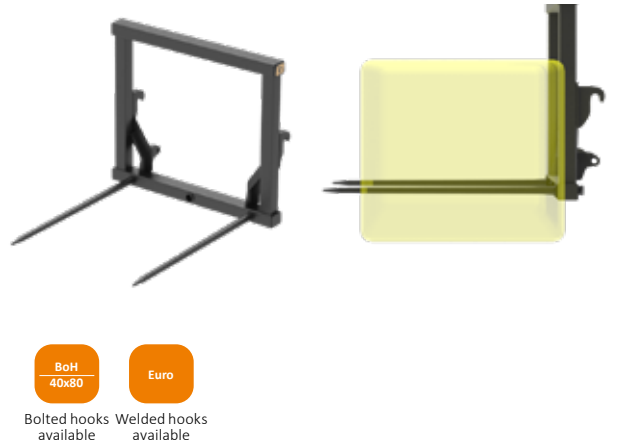

Bale Fork S+ 115 (folding tines)

DESIGNED FOR SMALLER AG TRACTORS AND THANKS TO NARROW WIDTH ALSO SUITABLE FOR YARD LOADERS WORKING IN STABLES

- Foldable tines for increased safety during transport.
- Available with accessories to further increase your productivity.
- Recommended for smaller AG tractors and yard loaders.

BALE FORK S+ 115	115
Width, cm	115
Height Frame, cm	106
Height extensions (min. - max), cm	124-159
Max. load capacity, kg	1000
No. of tines, Cone 2	Up to 2
Weight Frame, kg	83

Available tine sets:
Tine set 2 pieces: 82 cm / 124 cm



Bale Spike

THE SIMPLE AND CLASSIC WAY TO HANDLE ROUND BALES

- To handle round bales.
- Longer tine to safely transport the bale.
- Shorter tines stops bale from rotating.

BALES SPIKE	
Width, cm	127
Tines length, cm	125
Weight, kg	60





LIFTING IMPLEMENTS

Pallet forks and big bag lifters, with plenty of accessories to meet your specific needs and tasks. When you choose lifting implements from Quicke, you choose maximum productivity and comfort.



LARS JOHANSSON
MECHANICAL DESIGNER


As the responsible designer for hook systems and also heavily involved in other projects, like the lifting implements, I am always looking for ways to improve our line of implements and fulfil the needs of our customers - the farmers. It is important that we stay close and connected to them, to make sure we provide them with ways to work smarter, not harder.

Pallet Fork XL [CAPACITY 8000 KG; FRAME WIDTH 200 CM]

PALLET FORK XL IS THE PERFECT CHOICE FOR HEAVY LOADS

- For heavy load applications.
- 2 meter wide frame to support various types of material handling.
- Available with fork extensions.

PALLET FORK XL		
Frame width (Type FEM III), cm	200	
Fork arms (Type FEM III A), kg	8000	
Length, cm	122	150
Dimension of fork arms, mm	150x65	150x65
Weight (differ by hook), kg	532	576
ACCESSORIES:		
Fork arm extension, cm	<200	<250

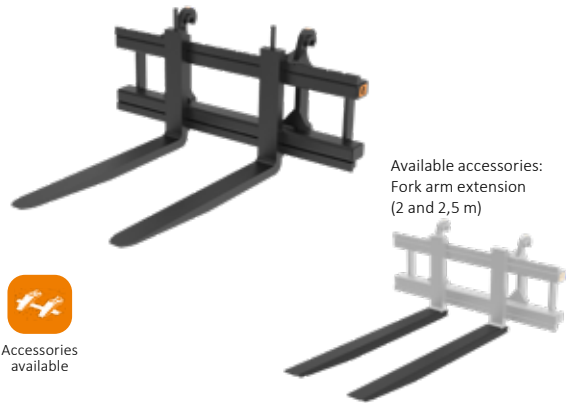

Available accessories:
Fork arm extension
(2 and 2,5 m)


Available hooks for Pallet fork XL:
VOLVO BM Large, JCB Q-FIT, Claas Scorpion, Manitou MLT, Merlo ZM3 3Pin

Pallet Fork L [CAPACITY 5000/3500 KG; FRAME WIDTH 150/120 CM]

PALLET FORK L IS IDEAL FOR TELEHANDLERS AND WHEEL LOADERS

- For heavy load applications.
- 1,2 and 1,5 meter frame width makes it perfect regardless machine type.
- Available with fork extensions.

PALLET FORK L				
Frame width (Type FEM III), cm	120	150	120	150
Fork arms (Type FEM III B), kg	3500	3500	5000	5000
Length, cm	122	150	122	150
Dimension of fork arms, mm	125x45	125x45	150x50	150x50
Weight (differ by hook), kg	278	304	333	363
ACCESSORIES:				
Fork arm extension, cm	<200	<250	<200	<250

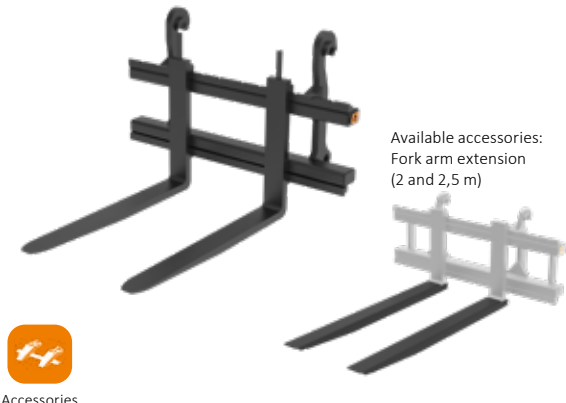

Available accessories:
Fork arm extension
(2 and 2,5 m)

Available hooks for Pallet fork L:
Bobcat / FDI / MF, Caterpillar CAT TH, Claas Scorpion, CNH LM, Dieci medium, Dieci large, Euro, JCB Q-Fit, JLG / Deutz Fahr, Kramer High, Manitou MLT, Matbro Pin and Cone, Merlo ZM2, Merlo, Merlo ZM3 3PIN, Schäffer Standard (SHW), Schäffer HD (Type KR), Volvo BM large, Weidemann, Weidemann 50-50, Zettelmeyer 602/Volvo L30, Sennebogen/Fendt

Pallet Fork M [CAPACITY UP TO 2500 KG; FRAME WIDTH 140 CM]

PALLET FORK M IDEAL FOR FRONT END LOADERS AND COMPACT WHEEL LOADERS

- 1,4 m wide frame makes it versatile in various AG tasks.
- See through design for full control of your work.
- Available with various accessories to increase use further.

PALLET FORK M					
Frame width (Type FEM II), cm	140				
Fork arms (Type FEM II B), kg	1000		1600		2500
Length, cm	97	122	97	122	122
Dimension of fork arms, mm	80x32	80x32	80x40	80x40	100x40
Weight (differ by hook), kg	157	167	169	181	202



Available accessories:
Log grab / hydraulic grab (1.)
Bale spike (2.)
Adapter for hydraulic fork arms adjustment (3.)
Fork arm extension (2m) (4.)

1.




Log grab/ hydraulic grab

2.



Bale spike

3.



Adapter for hydraulic
fork arms adjustment

4.



Fork arm extension (2m)

Pallet Fork M+ Hydraulic [CAPACITY UP TO 3000 KG; FRAME WIDTH 120/150 CM]

AVAILABLE IN 120 AND 150 CM WIDTH FOR FRONT LOADERS, COMPACT WHEEL LOADERS AND MEDIUM SIZED TELEHANDLERS

- Hydraulic Pallet Fork available with both fork spread and side-shift functionality.
- 3 ton lift capacity and with wide arm support for enhanced stability.
- Offered with 40x80 BoH system makes it possible to fit most loaders.

PALLET FORK M+ HYDRAULIC				
Frame width (Type FEM II), cm	120/150			
Working width (min-max), cm	36-114		36-141	
Fork arms (Type FEM II B), kg	2500		3000	
Length, cm	122	150	122	150
Dimension of fork arms, mm	100x40		100x45	
Weight (differ by hook), kg	257	270	286	302



Bolted hooks available



Accessories available



Max pressure 210 bar

Available accessories:
Pressure relief valve
Side shift electro-hydraulic 12V / 24V
Fork arm extension (2m)

Pallet Fork S [CAPACITY UP TO 2500 KG; FRAME WIDTH 100/120 CM]

PALLET FORK S IDEAL FOR YARD/COMPACT LOADER

- Narrow design for easy access in limited spaces.
- See through design for full control of your work.
- Available with the most common hook types.

PALLET FORK S					
Frame width (Type FEM II), cm	100/120				
Fork arms (Type FEM II B), kg	1000		1600		2500
Length, cm	97	122	97	122	122
Dimension of fork arms, mm	80x32	80x32	80x40	80x40	100x40
Weight (differ by hook), kg	112	122	130	136	157

Available hooks for Pallet fork S frame 100 cm width:
SMS, Avant, Giant, Kramer Compact, Weidemann, Schäffer Standard (SHW), Schäffer Hoftrack, Zettelmeyer 402/Volvo L20

Available hooks for Pallet fork S frame 120 cm width: Euro



Accessories available

Action Video!



Available accessories:
Bale spike
Fork arm extension (2m)

Pallet Fork C [CAPACITY UP TO 1000 KG; FRAME WIDTH 115,4 CM]

PALLET FORK C FOR COMPACT TRACTOR LOADERS

- Designed with low weight and capacity perfected for compact tractor loaders.
- See through design for full control of your work.
- Available with Euro and Skid steer.

PALLET FORK C		
Frame width (Type FEM II), cm	115,4	
Fork arms (Type FEM II B), kg	1000	
Length, cm	80	106
Dimension of fork arms, mm	80x32	80x32
Weight (differ by hook), kg	97	107

Available hooks for Pallet fork C frame 115 cm width:
Euro, Skid steer, Pin on (only for Quicke C-Series loader)



Accessories available

Action Video!



Available accessories:
Bale spike



Big Bag Lifter

FOR SECURE HANDLING OF BIG BAGS

- Three different models; single, dual and triple.
- For all big bag handling scenarios.
- Bolted hooks add flexibility.

BIG BAG LIFTER	SINGLE*	DUAL**	TRIPLE**
Width, cm	127	213	278
Height min., cm	164	170	170
Height max., cm	164	221	221
Max. load (each arm), kg	1000	1500	1500
Weight, kg	79	177	269

*Big Bag Lifter single with BOH system 40x80
**Big Bag Lifter DUAL, TRIPLE with BOH system 80x80



Bolted hooks available



Bolted hooks available

Explanation Video!



Tool Carrier Adaptors

- Tool carrier adaptors transforms one type of tool carrier to another.
- Adaptor with Bolt on Hooks on the machine side creates maximum flexibility.
- Robust design and secure locking mechanism.

With Bolt on Hooks

[LOADER SIDE - IMPLEMENT SIDE]

- Adaptor BoH 40x80 - Euro
- Adaptor BoH 40x80 - Euro/SMS
- Adaptor BoH 80x80 - Volvo BM Large

With welded Hooks

[LOADER SIDE - IMPLEMENT SIDE]

- Adaptor 3PL - Euro
- Adaptor 3PL - SMS
- Adaptor Euro - Skid Steer
- Adaptor Euro - Valtra
- Adaptor Euro - SMS
- Adaptor Euro - ALO type 3
- Adaptor SMS - ALO type 3



Bolted hooks available



WE'VE GOT SPARE PARTS CLOSE BY EVEN WHEN YOU'RE FAR AWAY

Spare parts are available for everything from the biggest to the tiniest detail on the implement, and we've got them close by. Our world-leading distribution network guarantees proximity to you, no matter where you are.

All you need to do is contact your local dealer.

www.quicke.com





WEIGHTS AND BUMPERS

Quicke is the answer to your ballasting needs. Our robust cast iron weights feature a high-quality finish and are easy to handle, adjust, and combine thanks to the modular add-on system. As part of our commitment to smart, high-quality solutions, we now offer an expanded and streamlined ballast range – available through the Quicke network.



STEFFEN STENGL
SALES MANAGER EXPORT - JOST AGRICULTURE GMBH, GERMANY

With Quicke's innovative weight systems and bumpers, we're giving farmers worldwide access to smarter, more complete front loader solutions. Our premium counterweights, bumpers, and wheel weights are all about combining performance, safety, and ease of use—so customers can work with confidence and efficiency every day.

OVERVIEW OF WEIGHTS

1 Weights



These weights combine outstanding durability with a professional appearance and high-quality craftsmanship. Delivered complete with pins and top link bracket. Thanks to two recesses on the underside, they can be easily moved using a pallet fork.

2 Wheel Weights



So Easy is a smart and modular wheel weight system that can be fitted to nearly any AG tractor on the market. It has a unique fastening method as it bolted directly to the axle studs - with four different types of adapters all most common tractor types can be fitted! Easy to move using a pallet fork.


3 Add-Ons



Optional add-on weights of 300 kg and 600 kg are available to increase the total weight. For enhanced road safety, the Q-Bumper is available with shock absorption, LED lights, and reflectors to ensure maximum visibility.



SO EASY WHEEL WEIGHTS


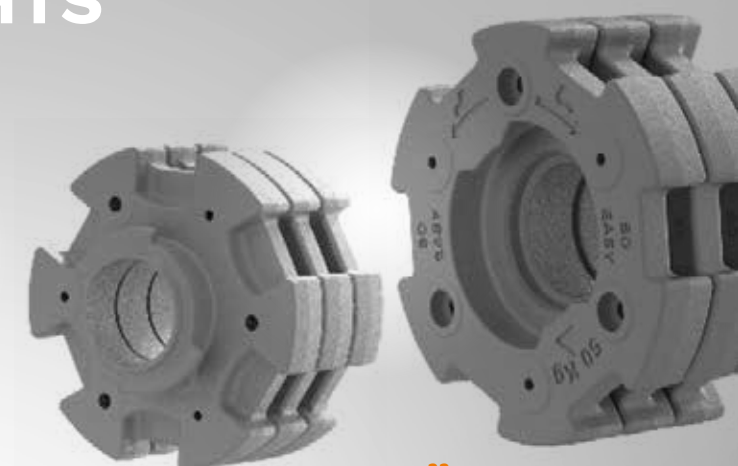


A SMART, MODULAR WHEEL WEIGHT SYSTEM THAT FITS ALL COMMON AG TRACTORS ON THE MARKET.

- Patented wheel weight system that fits all common AG Tractors by attaching to axle studs, independent of rim design.
- Modular from 75 kg to 400 kg per wheel.
- Failsafe and easy to assemble and disassemble.

So Easy Wheel Weights	Weight	Colors
So Easy Wheel weight 150, both sides kit, 2x 50	150 kg	Grey, Yellow
So Easy Wheel weight 250, both sides kit, 4x 50	250 kg	
So Easy Wheel weight 350, both sides kit, 6x 50	350 kg	
So Easy Wheel weight 300, both sides kit, 2x 125	300 kg	
So Easy Wheel weight 550, both sides kit, 4x 125	550 kg	
So Easy Wheel weight 800, both sides kit, 6x 125	800 kg	

Explanation Video!

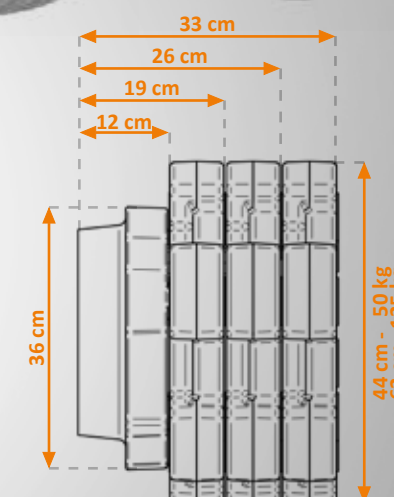

WEIGHTS

TOUGH WITH A STYLISH DESIGN



Q-BLOQ CAST IRON

THANKS TO ITS SOLID CONSTRUCTION, IT OFFERS THE MOST COMPACT BALLAST SOLUTION WITH A SMOOTH, ATTRACTIVE FINISH.

- Most compact and appealing way to ballast your tractor
- Improve stability and the distribution of weight
- Possible to fit to both the rear and front hitch of tractors



Q-Bloq Cast Iron	Weight	Colors
Q-Bloq 600	600 kg	Black, Grey*
Q-Bloq 900	900 kg	
Q-Bloq 1800	1800 kg	Black, Grey, Green

*Look at the Q-Bloq Multi-Attach for John Deere green Cast Iron weights.



WEIGHTS

Q-BLOQ MULTI-ATTACH JOHN DEERE

COMPATIBLE WITH BOTH FRONT AND REAR 3-POINT LINKAGES, AND MOUNTS DIRECTLY ONTO JOHN DEERE FRONT WEIGHT CARRIERS.

- Possible to mount directly on John Deere tractors weight carrier as well rear and front hitch
- Most compact and appealing way to ballast your tractor
- Improve stability and the distribution of weight



Q-BLOQ MINERAL

Q-Bloq Mineral	Weight	Colors
Q-Bloq Mineral 600	600 kg	Black, Grey, Green
Q-Bloq Mineral 800	800 kg	
Q-Bloq Mineral 1050	1050 kg	



- A smart and modular weights system
- To increase the Q-Bloq Mineral weight, the core consists of iron, surrounded by concrete and magnetite
- Improve stability and the distribution of weight
- Possible to fit to both the rear and front hitch of tractors

Q-BLOQ CONCRETE

Q-Bloq Concrete	Weights	Colors
Q-Bloq Concrete 450	450 kg	Black
Q-Bloq Concrete 600	600 kg	
Q-Bloq Concrete 750	750 kg	
Q-Bloq Concrete 900	900 kg	
Q-Bloq Concrete 1050	1050 kg	
Q-Bloq Concrete 1450	1450 kg	



- Simple way to ballast your tractor
- Improve stability and the distribution of weight
- Possible to fit to both the rear and front hitch of tractors

Q-BLOQ COMPACT CONCRETE

Q-Bumper and Q-Bloq	Weights	Colors
Q-Bloq C Concrete 275	275 kg	Black
Q-Bloq C Concrete 450	450 kg	



- Rear counterweight for compact tractors
- Improve stability and the distribution of weight
- Easy to attach as no need of top link

BALLAST BOX

Ballast Box	Weights	Colors
Ballast box 800	800 kg	Black
Ballast box 1200	1200 kg	



- Cost effective counterweight for loader work
- Fill it up yourself with concrete to reach the desired weight
- Easy to attach with lifting rod and no need of top link

Q-TOOLBOX

Q-Toolbox	Weight	Colors
Q-Toolbox 450	450 kg	Black, Grey, Green

- Cast iron weight with integrated toolbox
- Improve stability and the distribution of weight
- Possible to fit to both the rear and front hitch of tractors



ADD-ONS

Q-BUMPER

Q-Bumper	Width	Colors
Q-Bumper	2,5 m	Black

- For added road safety, the Q-Bloq 1800 kg, Q-Toolbox, and Q-Bloq Mineral can be fitted with the Q-Bumper
- Made of high-quality aluminium and extends up to 2.5 m wide
- Shock absorption for increased safety, with LED lights and reflectors for maximum visibility

Q-BLOQ ADD ON

Q-Bloq Add on	Weights	Colors
Q-Bloq Add on 300	300 kg	Black, Grey, Yellow
Q-Bloq Add on 600	600 kg	

- Optional add-on weights that can be mounted to increase the total ballast weight
- Easily attached and locked with a pin than is supplied with the add-on weight
- Compatible with Q-Bloq Cast Iron, Q-Bloq Multi-attach, Q-Toolbox and Q-Bloq Mineral weight



Q-Bloq Add-on

Q-Bumper: Shock absorption system



THE SUPPORT

As an Quicke Implement owner, you can expect world-leading level of reliability and service. Your purchase does not end our commitment to you – it's only the beginning.

Your implement has to perform at its best for a long time. We have built up a strong global organisation with a comprehensive service network, giving you easy and fast access to locations for service, spare parts and knowledgeable support- wherever you operate in the world.

You can be sure that our service and support meets the same standard as our products – always aiming for 100 percent customer satisfaction. To us, second best is not enough.

ABSOLUTE CUSTOMER FOCUS. In order to support you as a customer, we have created routines that ensure all the departments in our organisation are focused on your requirements.

QUICK ONLINE HELP. You'll have round-the-clock online access to spare part details, instructions and other important information.

TIGHT-KNIT SPARE PART NETWORK. Spare parts are available from our subsidiaries as well as from larger Quicke implement representatives world-wide.

PROXIMITY. Our world-leading distribution network guarantees proximity to you, no matter where you are.

GLOBAL TECHNICAL SUPPORT. As an Quicke Implement customer, you always have access to prompt technical support. All over the world, our representatives can provide knowledgeable and high-quality service.



CONSTANT FOLLOW-UP. Your viewpoints and suggestions for improvement are gathered together and centrally processed. This follow-up functions as a valuable basis for us when developing implements. The development of Quicke Implement is the result of close cooperation with users all over the world.

HOOK SYSTEMS

A VARIETY OF HOOK SYSTEMS FOR ANY MATERIAL HANDLER

Our implements can be used with a variety of hooks to attach them to different loading machines. The angle of the back of the implement and the working geometry of the loader influence the design of the hooks. We use the following systems:

- **M24:** The hooks are welded on plates that are bolted to the back of the implement with 18 to 20 M24 bolts. These are used on the L and XL implement range.
- **M16 S/L:** The hooks are welded on plates that are bolted to the back of the implement with 8 to 16 M16 bolts. These are used on the S and M implement range.
- **80x80 XL:** With U-bolts mounted at the back of the implement.
- **80x80:** With U-bolts or HD bolt kits mounted at the back of the implement.
- **60x80:** With U-bolts or HD bolt kits mounted at the back of the implement.
- **40x80:** With U-bolts or HD bolt kits mounted at the back of the implement.
- **Welded hooks.**

40x80/80x80



Bale Spike
Big Bag Lifter
Flexibal
Flexigrip
Quadrogrip
Silocut M+ / L+
Silosplit
Bale Fork S+/L+/XL+
Stone Fork M+
Topgrip
Unigrip
Bucket XH M+

80x80 XL



Silocut XL+
Stone Fork XL+



M24



Bucket SXL+
Bucket SL+
Bucket GXL+
Bucket GL+
Bucket VXL+
Bucket VL+
Powergrab L+ / XL+

M16 S/L



Bucket SM+
Bucket GM+
Bucket GS+
Bucket VS+
Bucket SC M+
Multibenne S+ / M+
Silograb S+ / M+
Manure Fork M+
Powergrab M+
Multigrab M+

At all times Quicke will strive to optimise our implements to give highest possible productivity on as many loading machines possible. Whether it’s a small yard loader or a large agricultural wheel loader, our commitment to provide you with the most efficient implement stays the same.

Quicke’s modular Bolt on Hook systems are designed to provide highest level of flexibility and best possible working angles for the implement.

Nevertheless, risk for collisions cannot always be avoided and Quicke cannot be held liable for any damages caused by failure to operate the implement in such way where damage is avoided. Please get in contact with your local dealer or Quicke representative in case of any questions.





Quicke

Member of **JOST** World

At all times Quicke will strive to optimise our implements to give highest possible productivity on as many loading machines possible. Whether it's a small yard loader or a large agricultural wheel loader, our commitment to provide you with the most efficient implement stays the same.

Quicke's modular Bolt on Hook systems are designed to provide highest level of flexibility and best possible working angles for the implement.

Nevertheless, risk for collisions cannot always be avoided and Quicke cannot be held liable for any damages caused by failure to operate the implement in such way where damage is avoided. Please get in contact with your local dealer or Quicke representative in case of any questions.

JOST Umeå AB

Brännland 300, SE-901 37 Umeå, Sweden

Tel: +46 (0)90 17 05 00

marketing-agriculture@jost-world.com

www.quicke.com

Version December 2025

CLIMATE
COMPENSATED
PAPER



Some products in this brochure are fitted with extra equipment. Certain products may be optional extra equipment. Some of the products are not available on all markets. Product specifications and performance data stated can vary depending on the tractor model. Working with front loaders and accompanying implements is not without risk. Serious injuries to people and damage to materials can occur in the event of incorrectly carried out work. Show consideration to your surroundings, use common sense and comply with local laws and regulations. Always read carefully through the instruction manual supplied. Only use original spare parts and accessories. Quicke's product range is continually being developed. This brochure contains most of the products that are in production at the time the brochure is printed. We reserve the right at any time to alter specifications, prices and versions with no obligation on our part. ®, ™ Trademarks of JOST Umeå AB.